

QUASER

we cut faster

HX SERIES

HX SERIES

	Pallet size	Spindle taper
HX404	□ 400	BBT40
HX504	□ 500	BBT40
HX505	□ 500	BBT50
HX635	□ 630	BBT50
HX805	□ 800	BBT50



Horizontal Machining Center



CONTENTS

01 - 02	<i>HX SERIES</i>
03 - 04	<i>HX404 & HX504 & HX505</i>
05 - 06	<i>HX635 & HX805</i>
07 - 08	<i>Unique spindle technology</i>
09 - 10	<i>Direct axes transmission</i>
11 - 12	<i>4th axes</i>
13	<i>Pallet system</i>
14	<i>HX504 & HX505 Cell</i>
15 - 16	<i>ATC system</i>
17 - 18	<i>Coolant & chip management</i>
19 - 20	<i>Easy operation</i>
21 - 26	<i>Technical Data</i>
27 - 28	<i>Standard / Option accessories</i>
29 - 30	<i>Cutting area interference</i>
31 - 33	<i>Machine Dimensions</i>
34	<i>We build machines in a hybrid way</i>



HX404 & HX504 & HX505

HX404 Max. workpiece: Ø630 mm x 900 mm / 400 kg

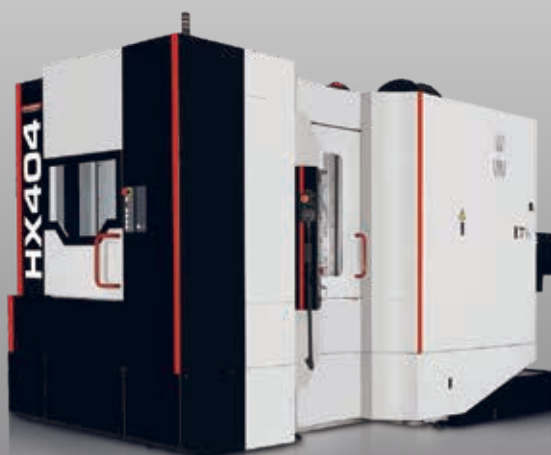
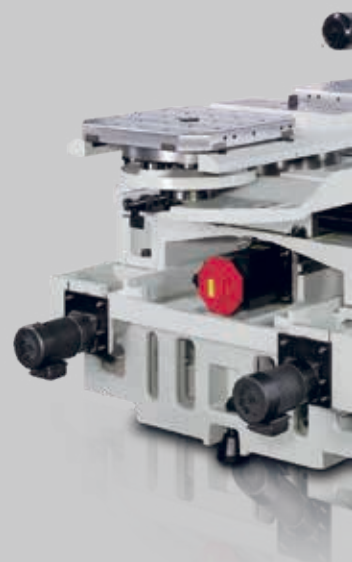


HX404E / HX404P



HX504 Max. workpiece: Ø762 mm x 900 mm / 500 kg

HX505 Max. workpiece: Ø800 mm x 900 mm / 500 kg

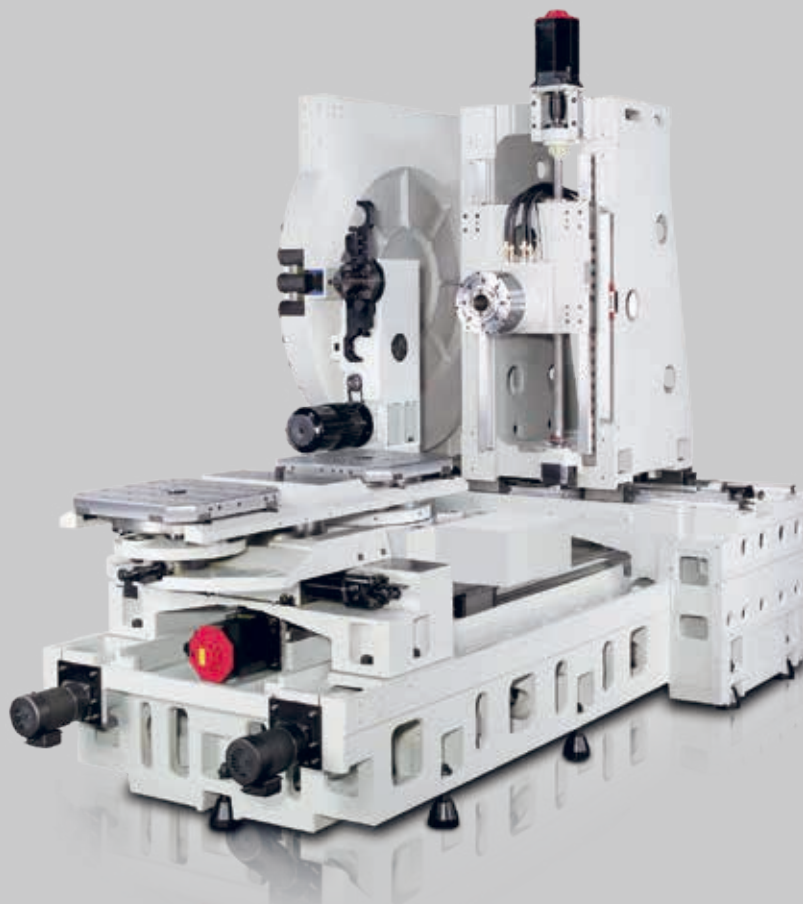
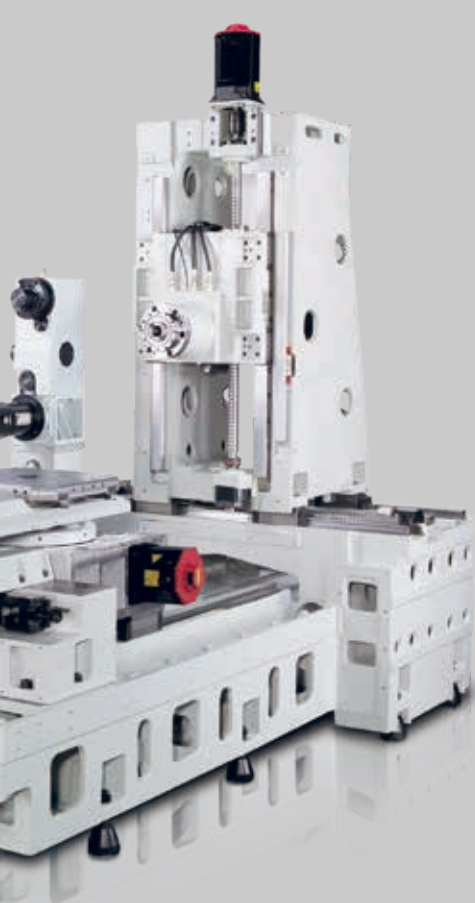


HX504E / HX504P


HX505E / HX505P

HX635 & HX805

HX635 Max. workpiece: Ø950 mm x 950 mm / 900 kg

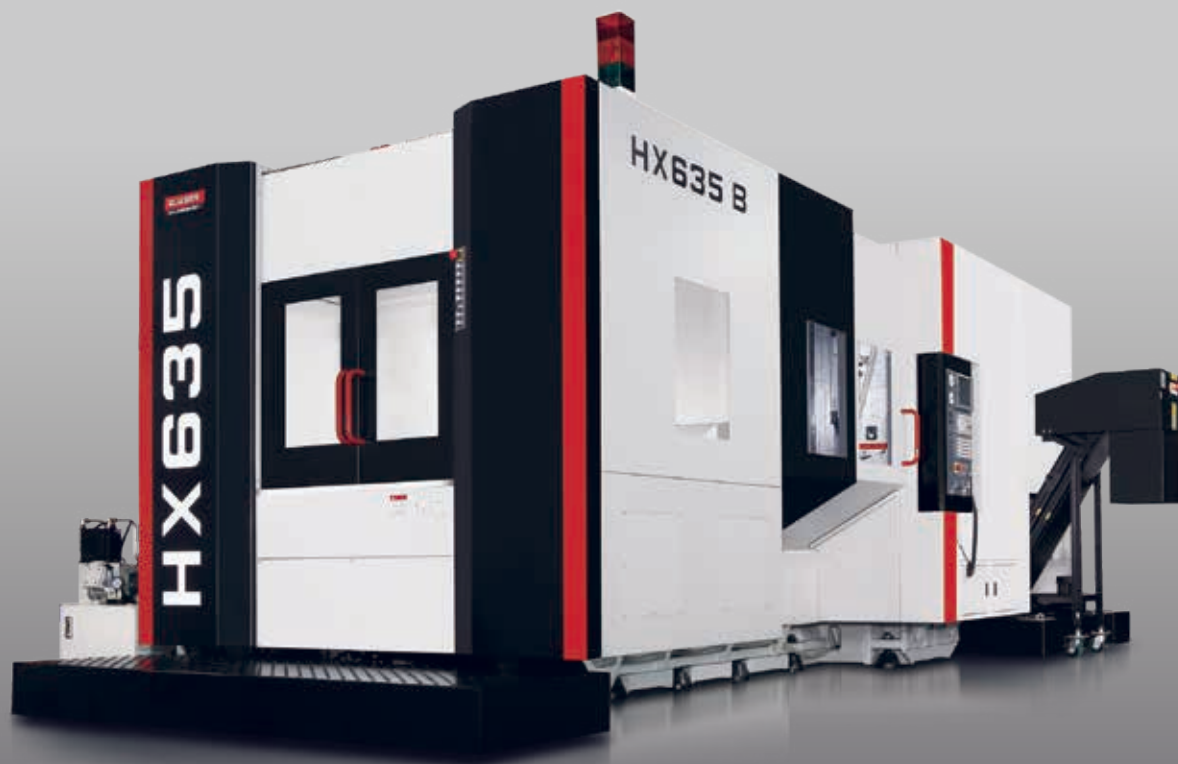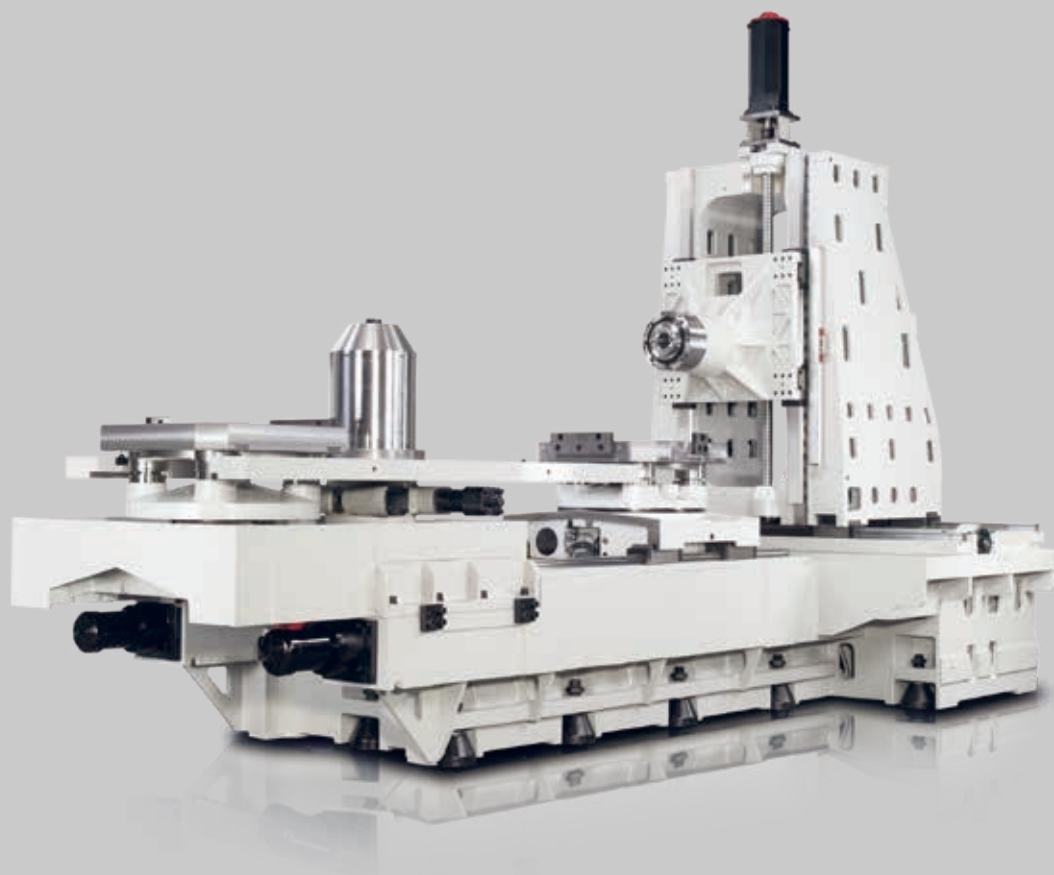



HX805 Max. workpiece: Ø1,200 mm x 1,100 mm / 1,500 kg

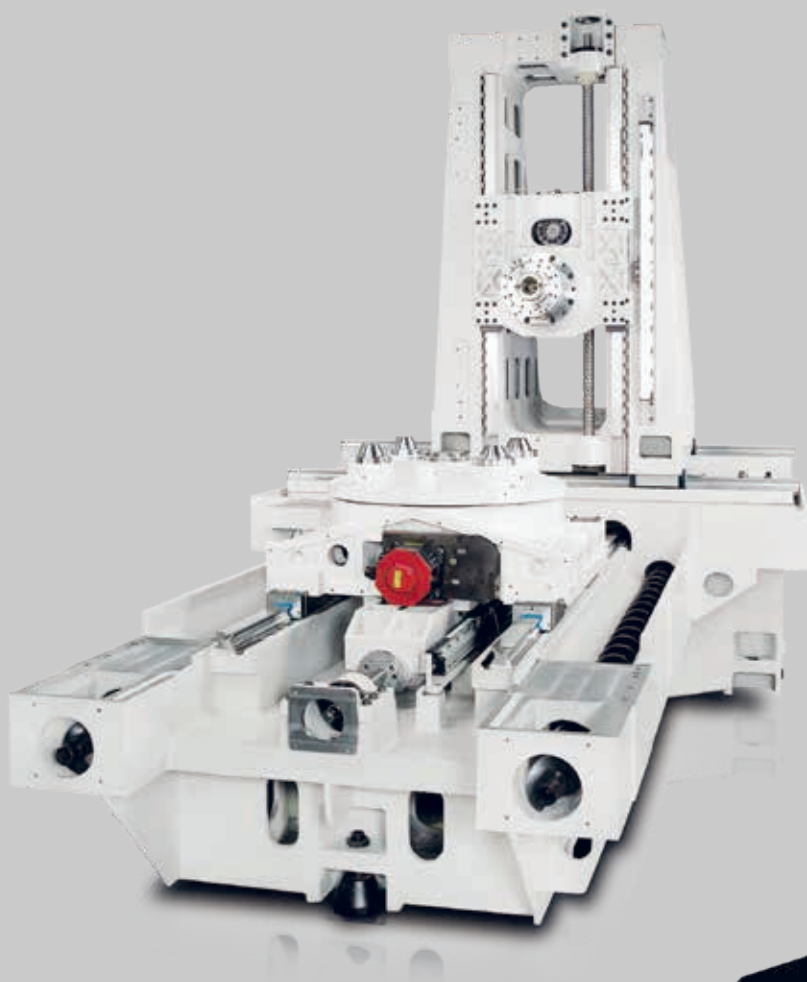



Note: Machine might be different from the photo if there is any update.

Unique spindle technology

- Re-grease supply system is stable and eco-friendly by supplying new grease intermittently to bearings during high speed rotation.

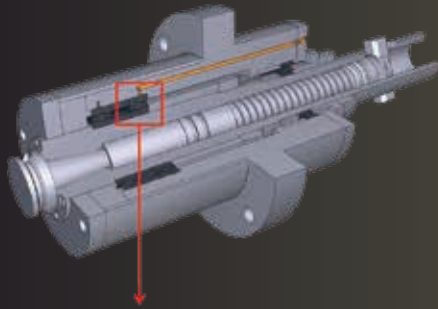


- Oil-Air lubrication system realizes stable operation on high speed rotation with large diameter spindles by utilizing compressed air to supply very little oil intermittently to the bearings.

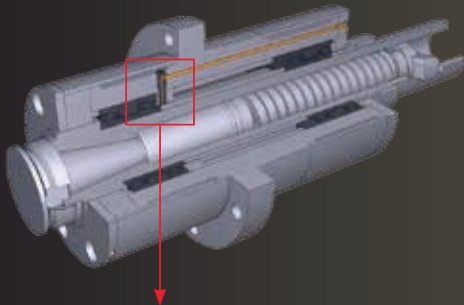

40/50 Taper

Belt driving

Coupling

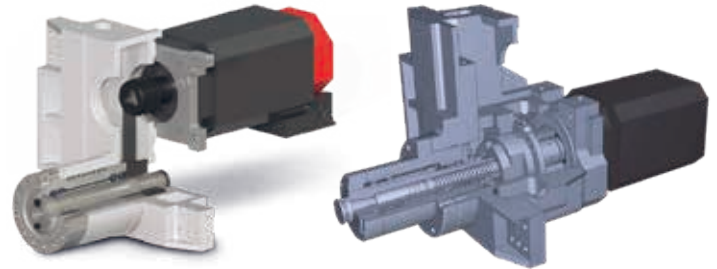

SPINDLE	MB-4.0		MB-4.0	
Shaft diameter	Ø70 / Ø65		Ø70 / Ø65	
Spindle Taper	ISO-40			
Bearing arrangement	< > =		< > =	
Ball bearing type	Ceramic		Ceramic	
Roller bearing type	Steel		Steel	
Bearing lubrication	Grease packed			
Transmission	Belt		Belt	
Spindle Speed	9,000	12,000	9,000	12,000
FANUC				
Spindle base speed	1,125	1,500	1,125	1,500
Spindle output power kW (S6-25%)	25	25	35	
Spindle output torque Nm (S6-25%)	212	159	297	223
SIEMENS				
Spindle base speed	-	-	1,500	2,000
Spindle output power kW (S6-25%)	-	-	46.5	
Spindle output torque Nm (S6-25%)	-	-	296	222
CTS Availability	●	●	●	●
Available NC adapting				
40 Taper				
HX404E	-	-	-	-
HX404P	-	-	-	-
HX504AE / HX504BE	●	●	-	-
HX504AP / HX504BP	-	-	● ●	● ●
50 Taper				
HX505AE	-	-	-	-
HX505AP	-	-	-	-
HX635A-HT / HX635B-HT	-	-	-	-
HX635A-HS / HX635B-HS	-	-	-	-
HX805A-HT / HX805B-HT	-	-	-	-
HX805A-HS / HX805B-HS	-	-	-	-

Note: (1) S6-60% (2) S6-40% (3) S3-40% (4) S3-25%

●: Standard ○: Option

Coupling

Gear box + Belt driving

Gear box + Coupling

Coupling



SC-4.2	MC-4.1R		MC-4.0R	SB-5.0A	SB-5.1A		SC-5.0	RC5.0A		MC-5.0A
Ø80 / Ø70	Ø80 / Ø65		Ø70 / Ø60	Ø100 / Ø90			Ø100			Ø90
ISO-40	ISO-40 / HSK A63			ISO-50				ISO-50		
<< >>	< > =		< > =	=<< > =	=<< > =		<< >>	<< >>		<< >>
Ceramic	Ceramic		Ceramic	Ceramic	Ceramic		Steel	Ceramic		Ceramic
-	Steel		Ceramic	Steel	Steel		-	-		-
Grease packed	Re-Grease			Oil-Air			Grease packed	Oil-Air		
Coupling	Coupling			Belt	Belt + Gear box		Coupling+ Gear box	Coupling		
12,000	15,000		20,000	6,000	6,000	7,500	6,000	10,000		15,000
1,500	1,400	600	1,150	750	300	375	375	500	460	600
15	26	30 ⁽¹⁾	15	35	35	35	35	18.5 ⁽³⁾	22 ⁽³⁾	30 ⁽¹⁾
95.5	177	350 ⁽²⁾	125	446	1114	891	891	353 ⁽³⁾	457 ⁽⁴⁾	350 ⁽²⁾
1,500	2,000	2,000	-	1,000	350	437.5	437.5	-	2,000	-
13.3	27.7	46.5	-	46.5	40.9	40.9	40.9	-	46.5	-
85	132	222	-	444	1,115	892	892	-	222	-
○	●	●	●	●	●	●	●	●	●	●
●●	-	-	-	-	-	-	-	-	-	-
-	●●	-	●	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
-	●	●●	●	-	-	-	-	-	-	-
-	-	-	-	●	-	-	-	●	-	-
-	-	-	-	●●	-	-	-	●	-	-
-	-	-	-	-	-	-	●●	-	-	-
-	-	-	-	-	-	-	-	-	●●	-
-	-	-	-	-	●●	●●	-	-	-	-
-	-	-	-	-	-	-	-	-	-	●

Direct axes transmission


Control: (F) FANUC (S) SIEMENS

		HX404		HX504		HX505		HX635 ; HX805	
		A / B		A / B		A		A / B	
Specification code		E	P	E	P	E	P	HT	HS
Motor X / Y / Z (KW)	F	4.5 / 4.5 / 4.5	4.5 / 5.5 / 5.5	3 / 4 / 3	4 / 4 / 4	4 / 4 / 4		7 / 6 / 7	
	S	3.1 / 3.1 / 4.9	4.9 / 4.9 / 4.9	-	4.8 / 4.4 / 4.8	-	4.8 / 4.8 / 4.8	4.4 / 4.4 / 4.4	
B (KW)	F	2.7 / 4.5		3 / 4		3		3 / 4	3 / 4
	S	2.7 / 3.3		-	2.7	-	2.7	3.3	
Rapid X / Y / Z (m/min)		48	60	32	48	32		40	
Acceleration X / Y / Z (m/s ²)		6 / 7 / 9 (F) (S)	7.8 / 9.8 / 9.8 (F) (S)	3 / 4 / 4 (F)	4 / 5 / 5 (F) 4 / 5 / 5 (S)	3 / 4 / 4 (F)	3 / 4 / 4 (F) 3 / 4 / 4 (S)	4 / 5 / 5 (F)	4 / 5 / 5 (S)

Note: A= 1° / B=0.001°


Thermal solution for HX404

• HX404

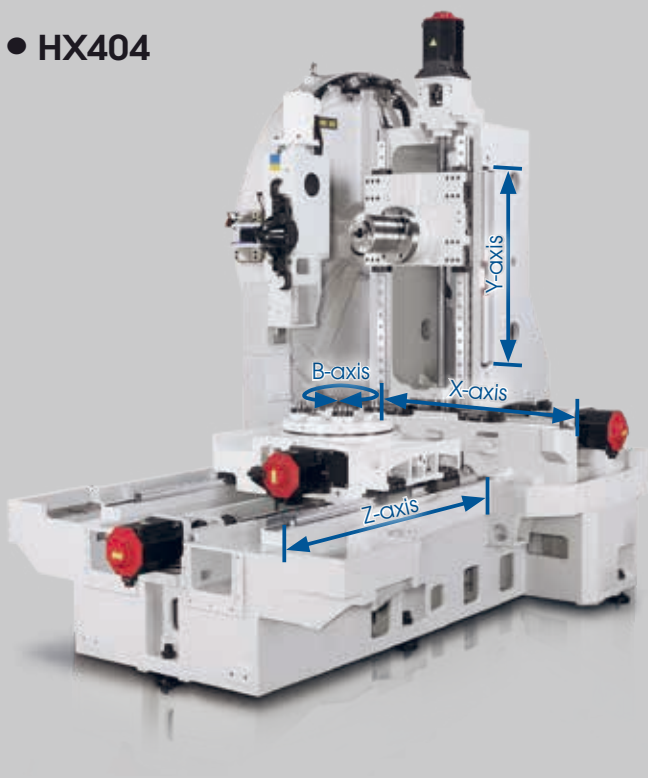


• Additional Y-axis cooling plate


Y axis cooling plate prevents the heat produced by the motor from conducting to Y axis which may cause deformation.

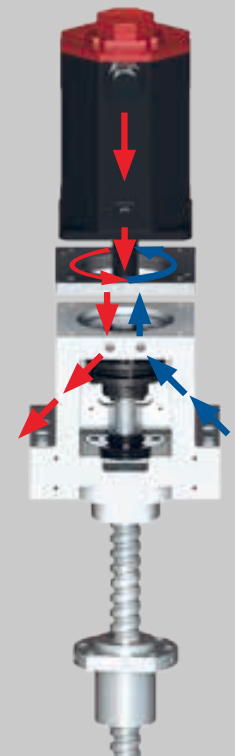


- Auto grease axes bearing and ballscrew nut.
- Coolant through ballscrew*

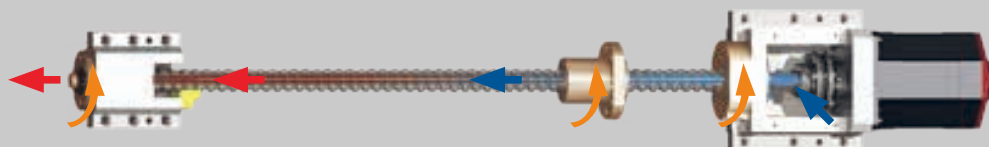

Note: *Coolant through ball screw is available on HX404E/P & HX504E/P

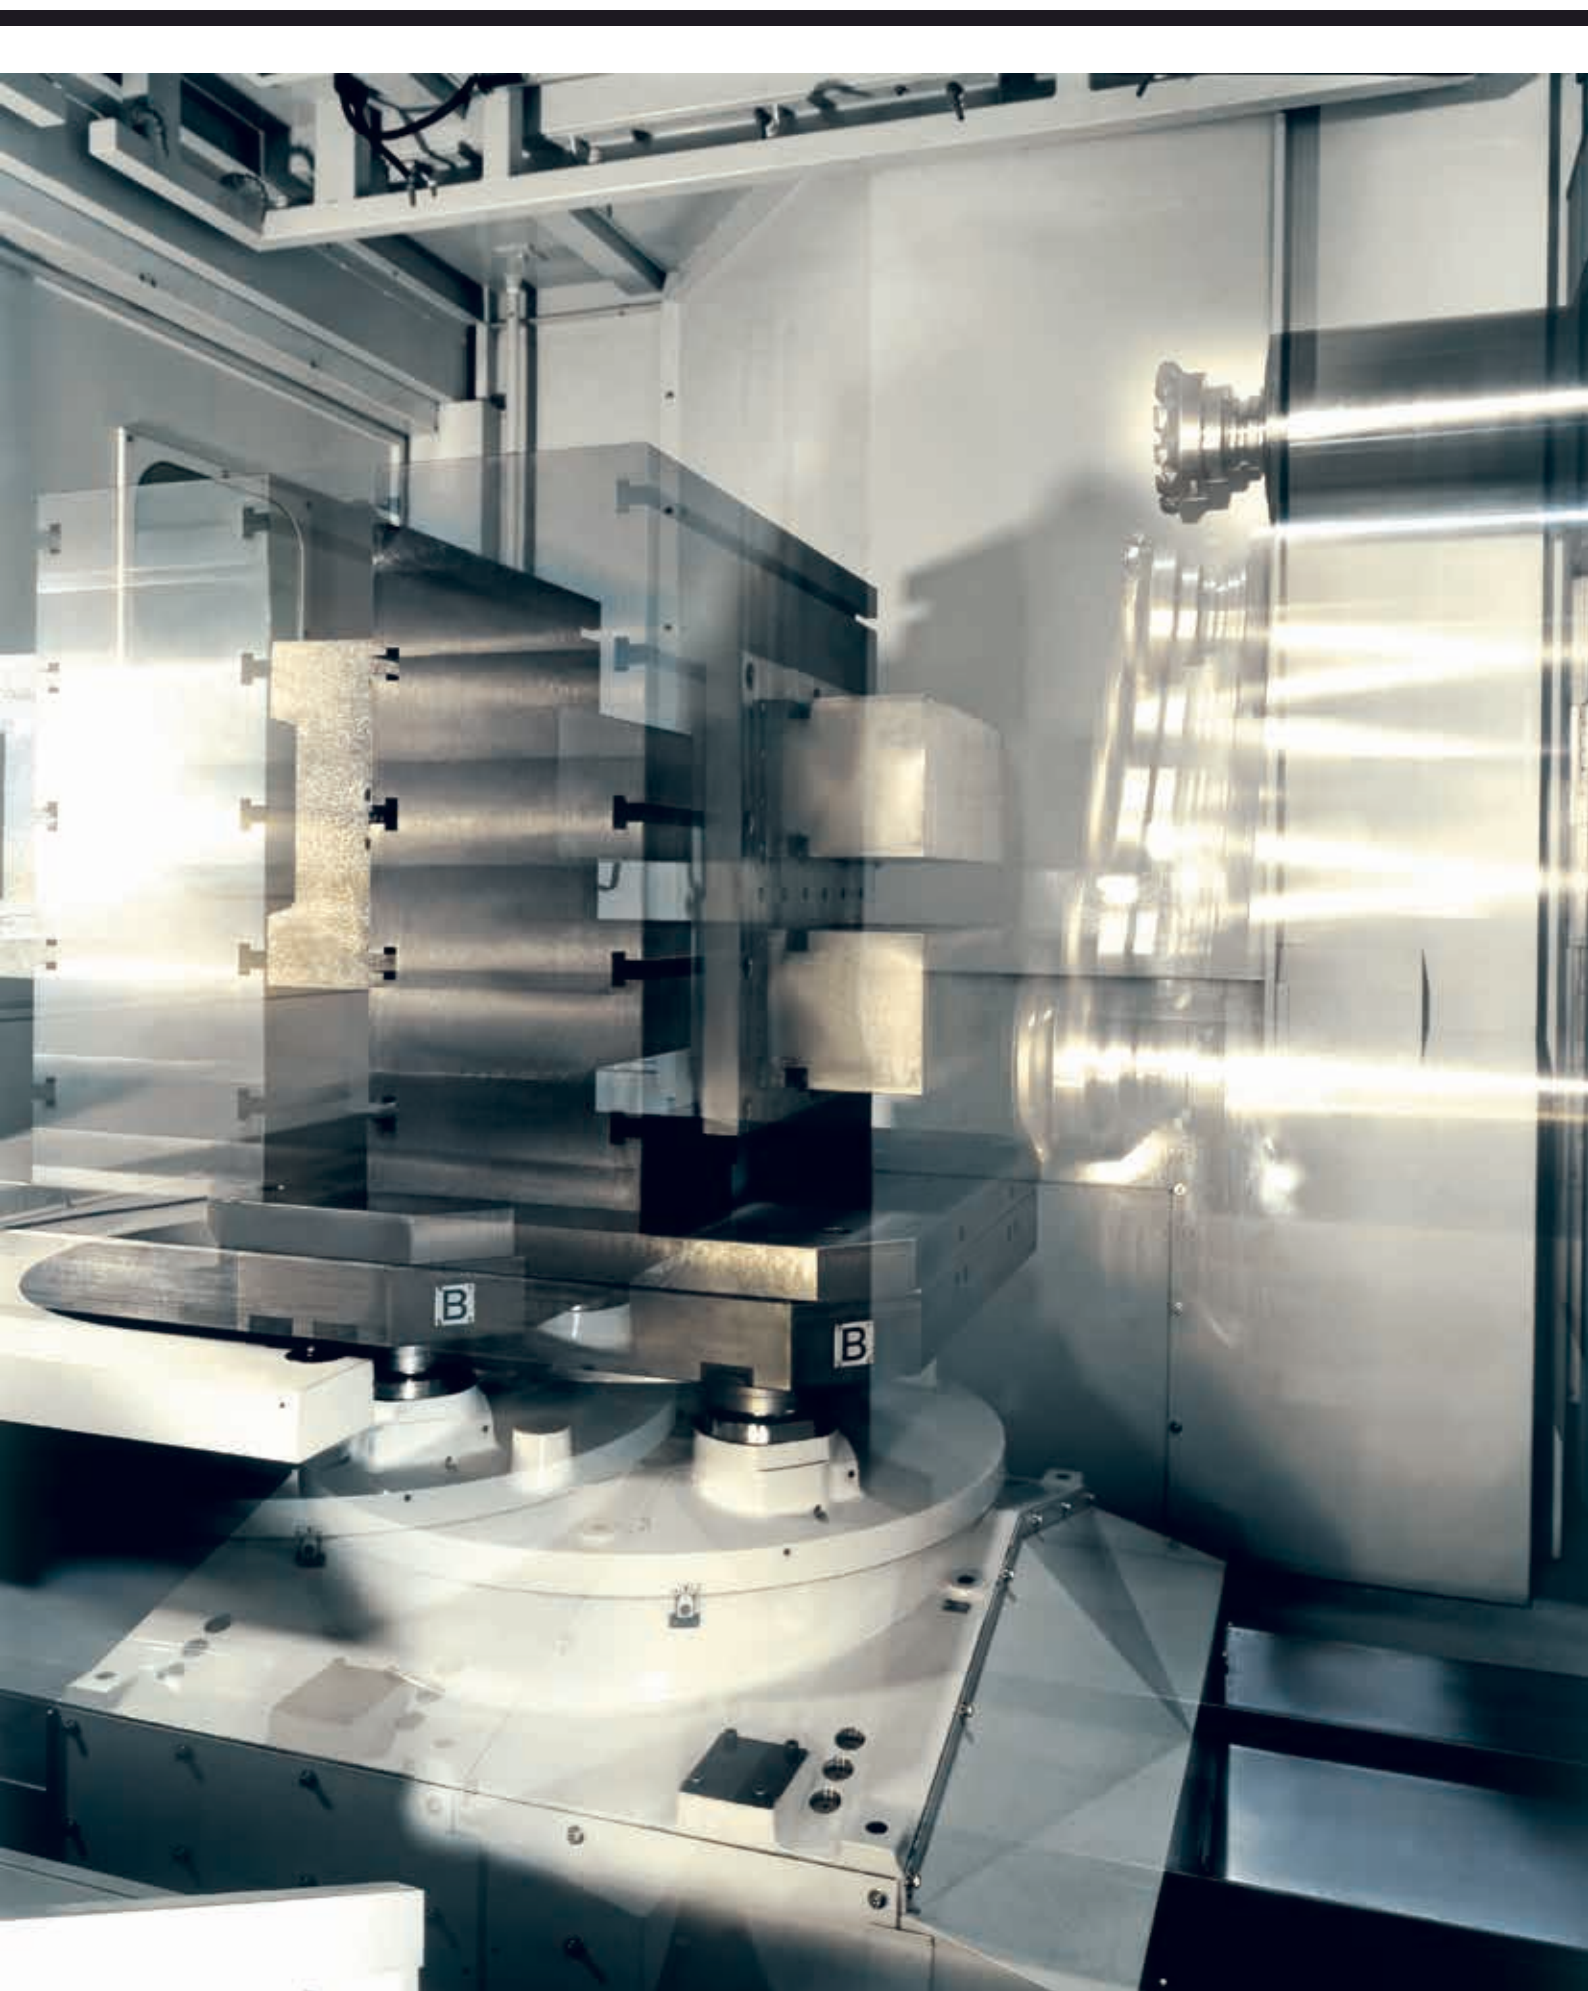


4th axes

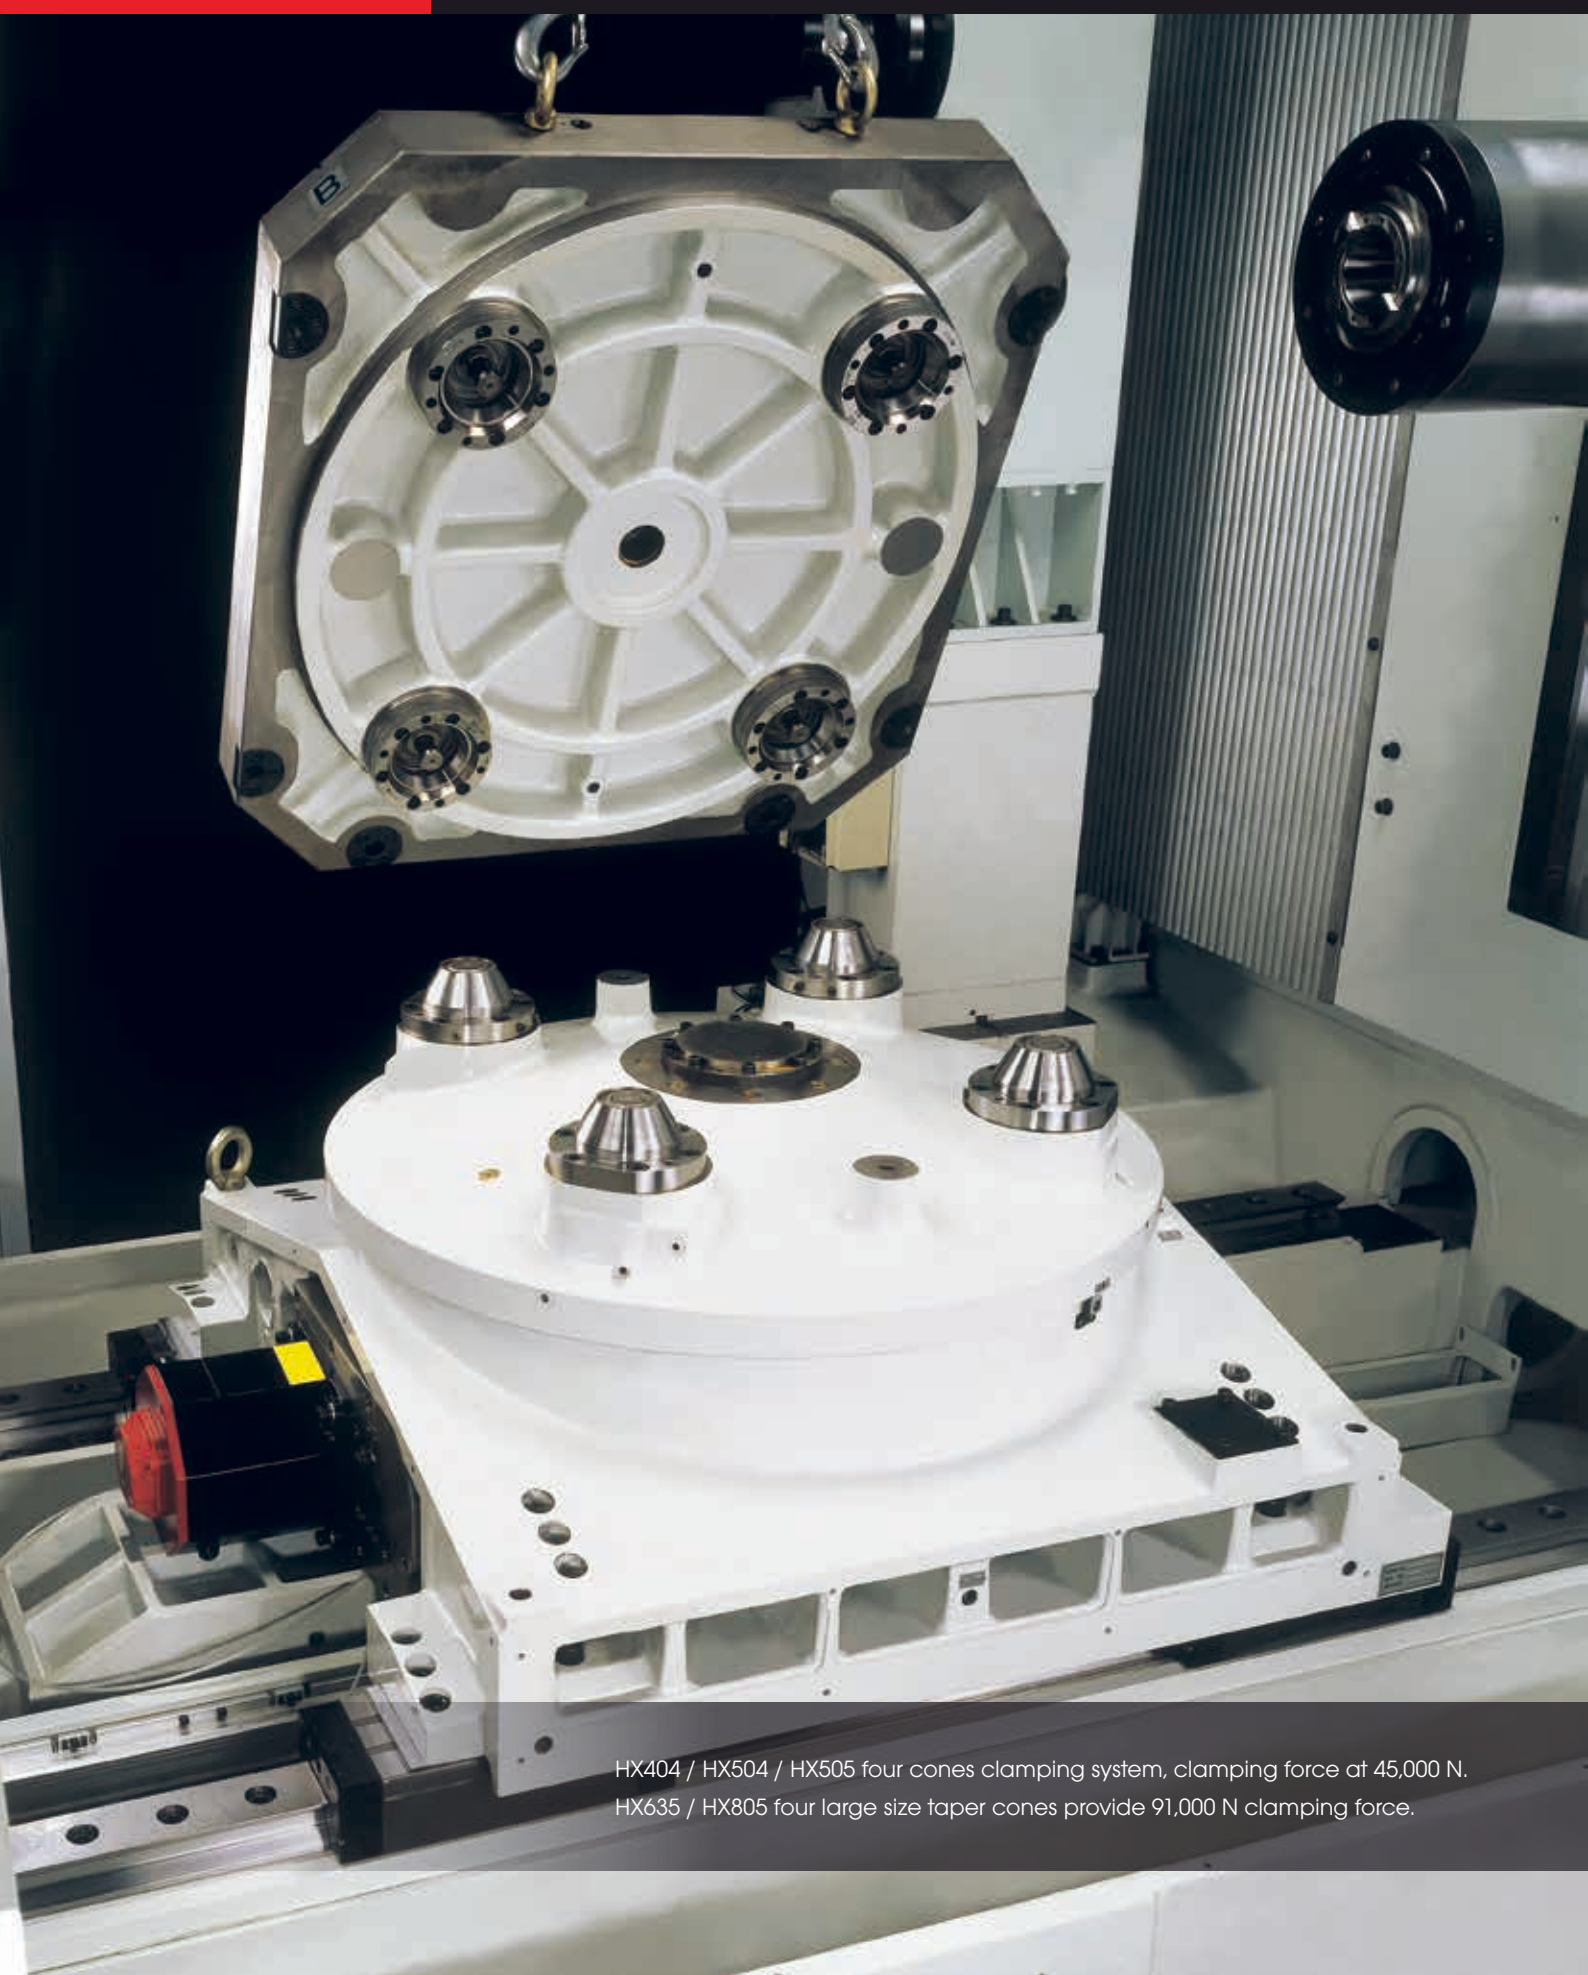


HX404 / HX504 / HX505 four cones clamping system, clamping force at 45,000 N.
HX635 / HX805 four large size taper cones provide 91,000 N clamping force.

1° indexing table Hirth coupling

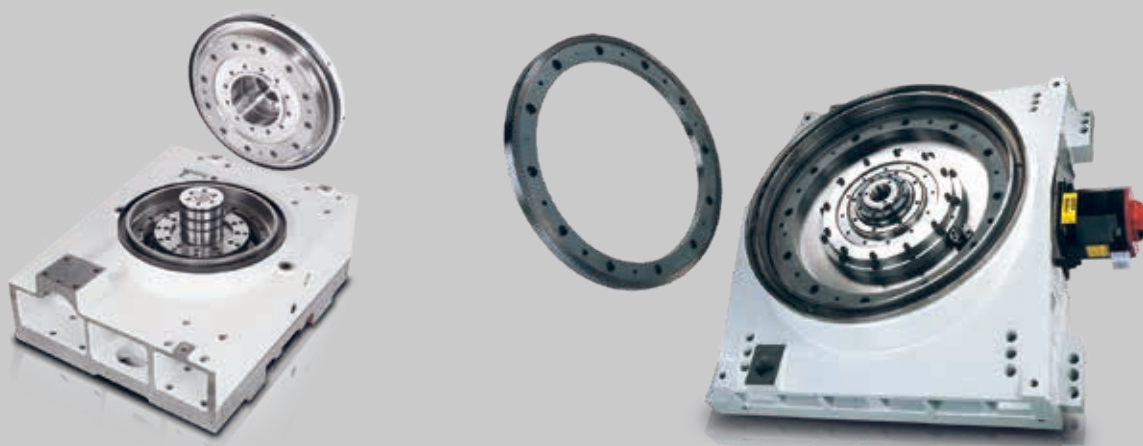

	HX404	HX504 / HX505	HX635	HX805
Pallet size	400 x 400 mm	500 x 500 mm	630 x 630 mm	800 x 800 mm
Accuracy (VDI)	8 sec	8 sec	8 sec	8 sec
Repeatability (VDI)	3 sec	3 sec	3 sec	3 sec
Large tooth coupling	Ø360	Ø360	Ø520	Ø700
Tilting moment	7,800 Nm	7,800 Nm	15,000 Nm	28,000 Nm
High clamping force	40,000 N	40,000 N	90,000 N	90,000 N


0.001° NC rotary table

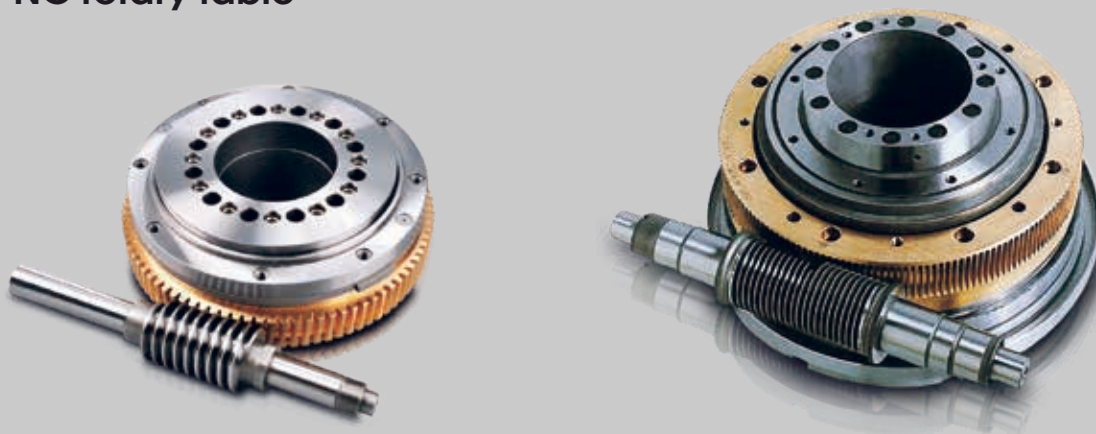


	HX404	HX504	HX635	HX805
Pallet size	400 x 400 mm	500 x 500 mm	630 x 630 mm	800 x 800 mm
Indexing accuracy (VDI)	10 sec	10 sec	10 sec	10 sec
Repeatability (VDI)	4 sec	4 sec	4 sec	4 sec
Tilting moment	4,000 Nm	4,000 Nm	9,000 Nm	19,000 Nm
High clamping force	3,200 N	3,200 N	4,100 N	5,635 N
Drive torque	2,550 Nm	2,550 Nm	2,550 Nm	3,200 Nm

Pallet system

	HX404		HX504		HX505		HX635		HX805	
Specification code	E	P	E	P	E	P	HT	HS	HT	HS
APC time (sec.) at 60Hz	10.5±0.2	5.5±0.2	10.5±0.2				14±0.2		19±0.2	
Pallet load capacity (kgs / each)	400		500				900		1500	
Pallet changing repeatability (mm)	0.01									

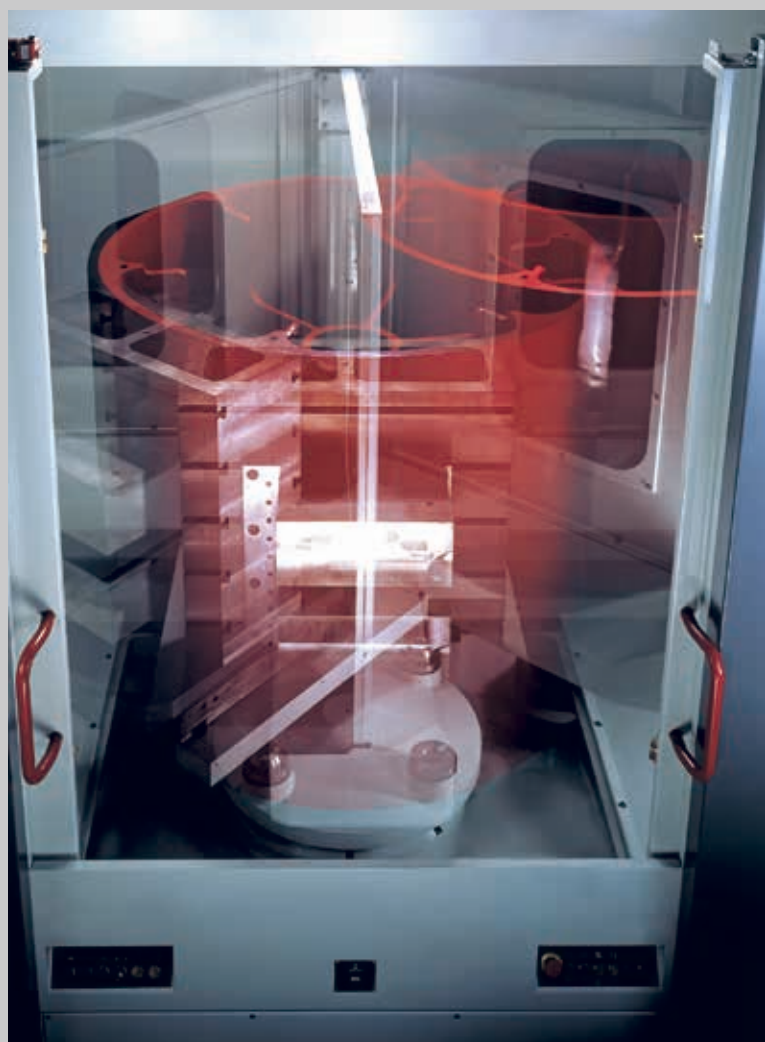

HX504 & HX505 Cell

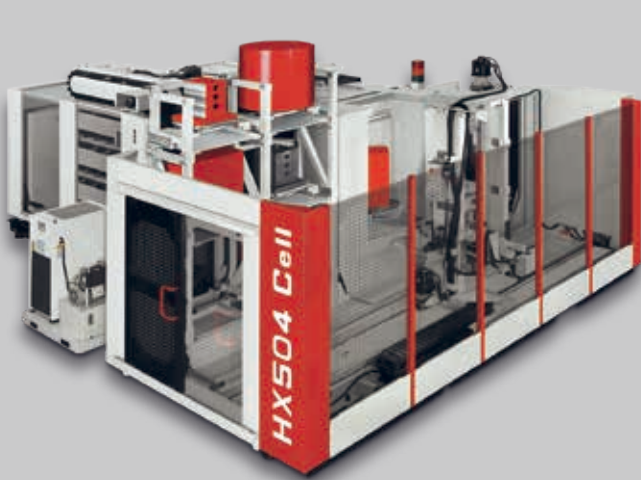


HX504: Max. ATC capacity: 240

Pallet capacity: 8 or 14

HX505: Max. ATC capacity: 150

Pallet capacity: 8 or 14

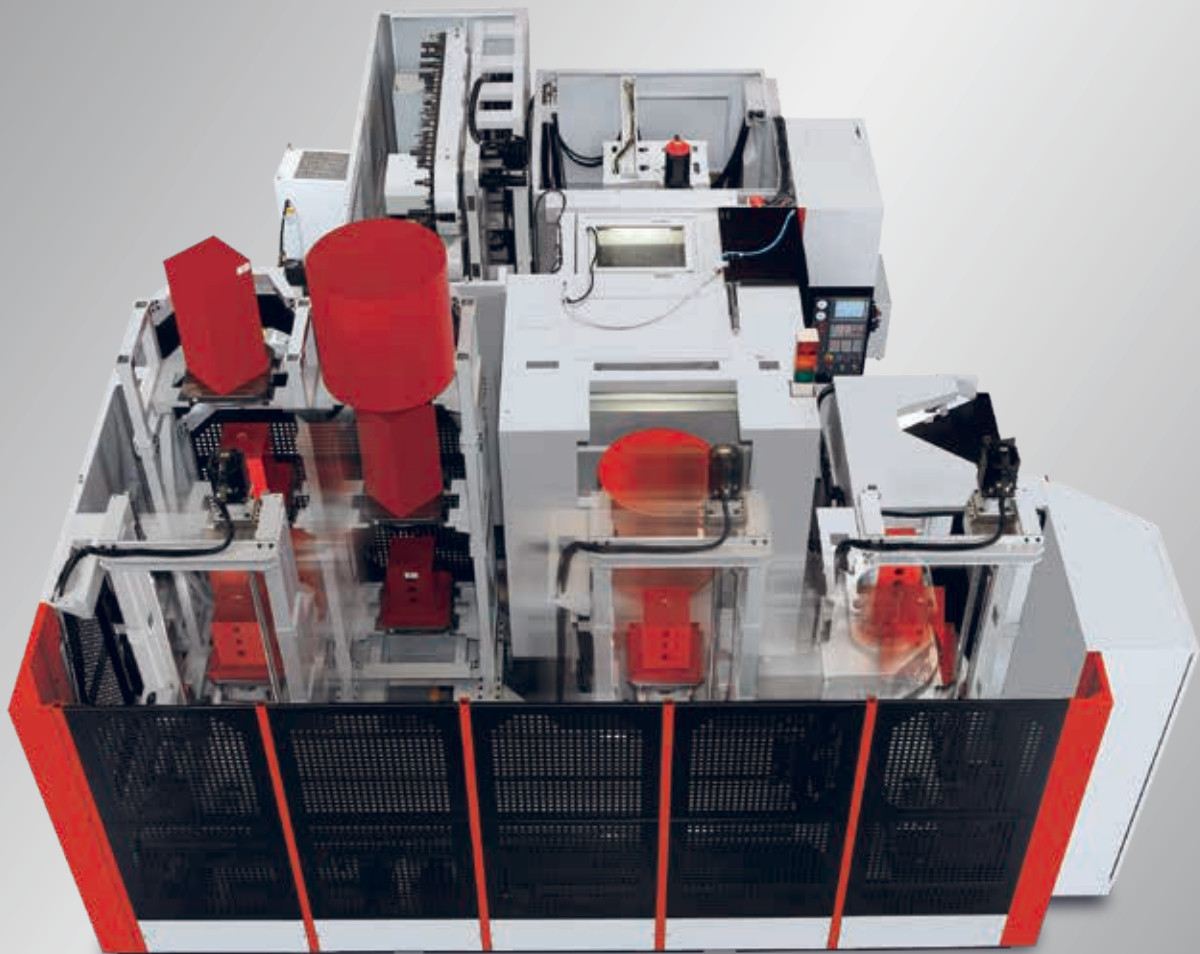

Note: Find details in Horizontal M/C Cell.


ATC system

(D) Disk type (C) Chain type


By std. magazine combination	HX404	HX504		HX505			HX635		
	A / B	A / B		A			A / B		
Specification code	E / P	E / P		E / P			HT / HS		
ATC type	ISO40			ISO50					
No. of tools	60 (D)	60 (D)	120 (C)	40 (D)	60 (C)	120 (C)	40 (D)	60 (C)	120 (C)
Max. tool length (mm)	350	450		400			500		
Max. tool weight (kg)	7	10	8	15	20	30	15	20	30
Max. tool diameter (mm)	Ø76.2		Ø95	Ø110		Ø125	Ø110	Ø125	

ISO40

60(C)



60(D)



120(C)




ISO50



40(D)



60(C)



120(C)

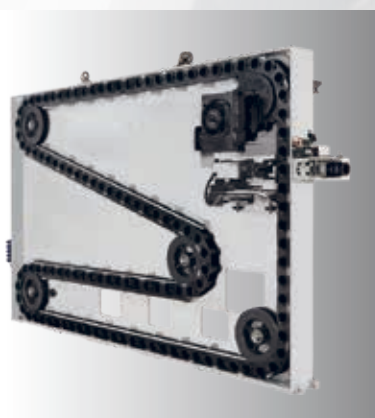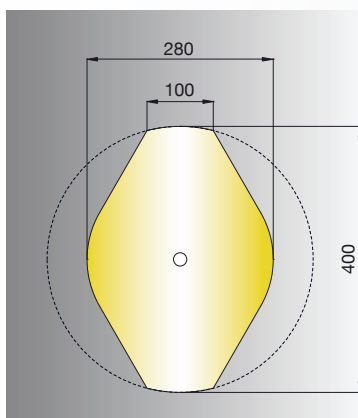

Ø400 is only applicable to special tools



HX805		By std. magazine combination	HX404		HX504		HX505		HX635		HX805	
A / B			A/B		A / B		A		A / B		A / B	
HT / HS		Specification code	E	P	E	P	E	P	HT	HS	HT	HS
		Tool to tool time (sec.) at 60Hz	1.3±0.2		2.3±0.2		3.4±0.2		3.9±0.2		3.9±0.2	
60 (C)	120 (C)											
600		Chip to chip time (sec.) at 60Hz	5±0.2		7±0.2		8±0.2		8.5±0.2		8.5±0.2	
20	30											
Ø125												

Coolant & chip management

Total solution on coolant & chip management:

- 1 Coolant through spindle
- 2 Nozzle coolant
- 3 Wash gun
- 4 Ceiling wash down
- 5 X axis way cover
- 6 Internal chip augers
- 7 Large capacity coolant tank
- 8 External chip conveyor
- 9 W-shaped Z axis telescopic cover (HX404) (patent)

	HX404		HX504		HX505		HX635		HX805	
Specification code	E	P	E	P	E	P	HT	HS	HT	HS
Coolant tank	650 L		450 L		450 L		900 L		1,200 L	
Coolant through spindle	8 bar	20 bar	20 bar		20 bar		20 bar			
Nozzle coolant	3.5 bar		3 bar				4 bar			
Ceiling wash down	3.5 bar		3 bar		3 bar		2.6 bar			
Wash gun	1.5 bar		3 bar		3 bar		2.6 bar			
Drum filter	Opt.		Opt.		Opt.		Opt.			






HX505



HX805

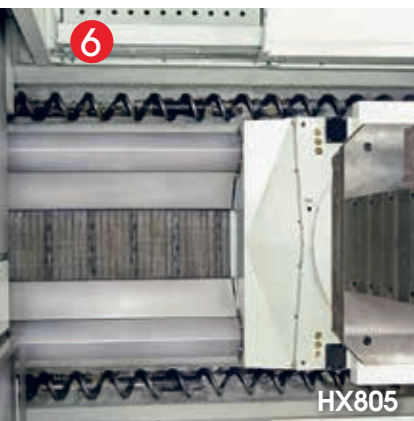

HX805



HX635




HX504/505




HX404

Easy operation

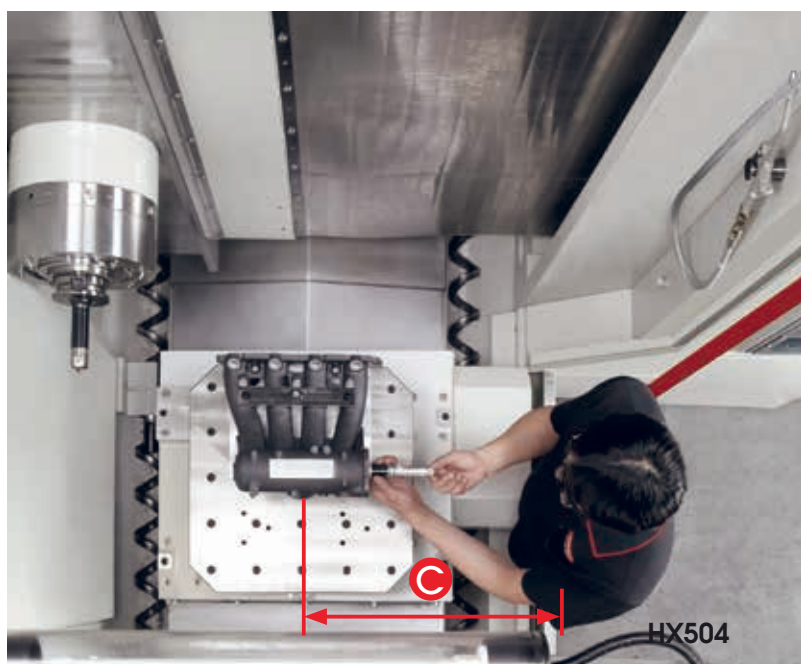

		HX404	HX504	HX505	HX635	HX805
A	Operator side door open	565 mm	703 mm	703 mm	745 mm	810 mm
B	Side door to spindle at convenient for manual tool loading / unloading from spindle	220 mm	285 mm	285 mm	145 mm	268 mm
C	From center of table to operator door	505 mm	645 mm	645 mm	645 mm	868 mm
D	Tool loading / unloading on magazine side					
E	Easy access to maintain machine					
F	Swivel type operation panel					
G	Hydraulic through pallet					

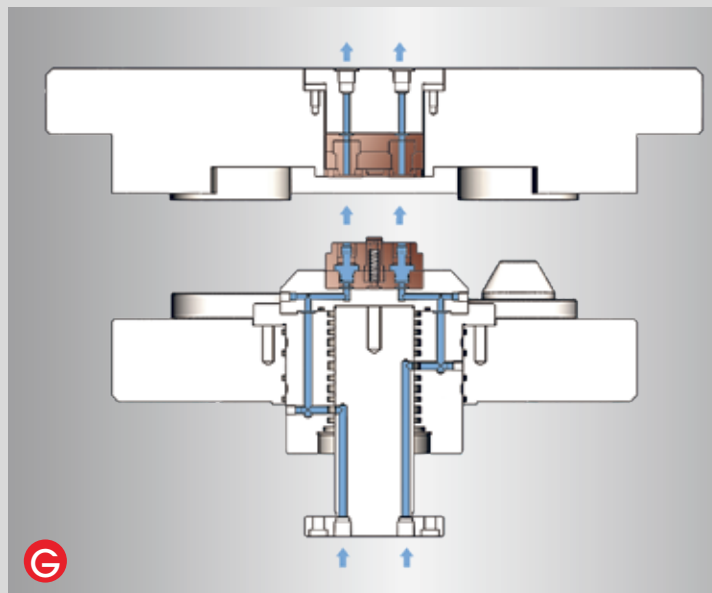

Technical Data		HX404		
		A / B		
Specification code		E		P
Work range				
Pallet size (mm)		□400		
Max. work swing diameter (mm)		Ø630		
Max. work piece height (mm)		900		
Table load capacity (kg)		400		
Travel X / Y / Z (mm)		560 / 640 / 640		
B minimum indexing (degree)		1 / 0.001		
Table surface to spindle center (mm)		80		
Spindle nose to table center (mm)		70		
Surface configuration		24-M16@pitch80 mm grid		
Feed drive				
Feed force	X / Y / Z (N)	8,638 / 8,638 / 8,638 (F) 7,854 / 7,854 / 10,603 (S)	6,911 / 9,425 / 9,425 (F) 8,483 / 8,483 / 8,483 (S)	6,911 / 9,425 / 9,425 (F)
Rapid movement	X / Y / Z (m/min)	48	60	
	B (sec. / 90 degree)	2.5 / 1.5		
Acceleration	X / Y / Z (m/s²)	6 / 7 / 9	7.8 / 9.8 / 9.8	
Dia. & pitch of the ball screw (mm)		Ø40 / 16	Ø40 / 20	
Accuracy Positioning / Repeatability				
ISO 230-2		0.008 / 0.004		
JIS 6338 (300 mm)		±0.003 / ±0.002		
VDI3441		0.008 / 0.004		
Main spindle				
Spindle taper		40 Taper		
Max. spindle speed		12,000	15,000 (std.)	20,000 (opt.) ⁽²⁾
Tool changer				
Tool selection		Random pocket, bidirectional selection		
Magazine positions		60		
Max. tool diameter w/o adjacent tool (mm)		Ø76.2 / Ø125		
Max. tool length (mm)		350		
Max. tool weight (kg)		7		
Max. tool weight moment (Nm)		10		
Tool to tool time (sec.) ⁽¹⁾		1.3±0.2		
Chip to chip time (sec.) ⁽¹⁾		5±0.2		
Pallet changer				
Number of pallet		2		
Method of pallet changer		ARM type		
Pallet change time (sec.)		10.5±0.2	5.5±0.2	
Pallet changing repeatability (mm)		0.01		
Coolant system				
Coolant tank capacity (Liter)		650 L		
- Nozzle coolant pump capacity		60 L/min., 3.5 bar		
- Coolant through spindle pump capacity		25 L/min., 8 bar	25 L/min., 20 bar	
- Ceiling & wash down pump capacity		60 L/min., 3.5 bar		
Machine size				
Height (mm)		2,895		
Floor space W x D (mm)		2,365 x 4,915		
Weight (kg)		10,500		
Connections				
Main power		220 ~ 230V / 50-60Hz, 380 ~ 415V / 50-60Hz		
Power consumption (KVA)		33 (F) 34 (S)	41(F) 43 (S)	41 (F)

Note: ⁽¹⁾At 60 Hz ⁽²⁾FANUC control only

●=Standard ○=Option X=N/A

Standard / Option accessories	HX404			
	A	B	A	B
Specification code	E		P	
■ FANUC 0i	●	●	×	×
FANUC - data server	○	○	○	○
■ FANUC 31i	×	×	●	●
AICC II (Lock-ahead 200 blocks)	×	×	●	●
FANUC - data server	○	○	○	○
FANUC - high speed processing (Lock-ahead 600 blocks)	×	×	○	○
■ SIEMENS 828D	○	○	×	×
■ SIEMENS 840D	×	×	○	○
■ Oil chiller	●	●	●	●
■ Coolant through ball screw	○	○	●	●
■ Lubrication Auto lube	●	●	×	×
■ Lubrication Auto grease	×	×	●	●
■ Balance tooling for spindle warm up	●	●	●	●
■ Pull stud for BT tooling	●	●	●	●
■ Air pressure detector for pallet clamping	●	●	●	●
■ Hydraulic through pallet (5 ports) ⁽³⁾	○	○	○	○
■ 2 pallet station	●	●	●	●
■ NC rotary table (0.001°) with rotary encoder	×	○	×	○
■ Linear encoder	○	○	○	○
■ Remote MPG	●	●	●	●
■ Transformer ⁽⁴⁾	○	○	○	○
■ Work probe	○	○	○	○
■ Thermal compensation	○	○	○	○
■ Tool length / breakage measurement (Laser)	○	○	○	○
■ 8 bar coolant through spindle	●	●	×	×
■ 20 bar coolant through spindle	○	○	●	●
■ 50 bar coolant through spindle	○	○	○	○
■ 70 bar coolant through spindle	○	○	○	○
■ Ceiling wash down coolant	●	●	●	●
■ Coolant wash gun (Pallet loading side and machine side)	●	●	●	●
■ Internal Chip augers	●	●	●	●
■ External chip conveyor	●	●	●	●
■ Drum type conveyor	○	○	○	○
■ Bag filter	○	○	○	○
■ Oil-mist collector	○	○	○	○
■ Documentation (USB) ⁽⁵⁾	●	●	●	●
■ Work light	●	●	●	●
■ Machine status light	●	●	●	●
■ CE & EMC ⁽⁶⁾ / GB	○	○	○	○

Note: ⁽³⁾Factory mounted only. ⁽⁴⁾Transformer as standard or option item will be varied according to control system and power supply condition. ⁽⁵⁾Paper documentation is option. ⁽⁶⁾Standard for EU area.
 - Machine specification might be different from the catalog if there is any specification update.

Technical Data		HX504				
		A / B				
Specification code		E		P		
Work range						
Pallet size (mm)		□500				
Max. work swing diameter (mm)		Ø762				
Max. work piece height (mm)		900				
Table load capacity (kg)		500				
Travel X / Y / Z (mm)		762 / 640 / 810				
B minimum indexing (degree)		1 / 0.001				
Table surface to spindle center (mm)		85 ~ 725 (Belt) 100 ~ 740 (Coupling)				
Spindle nose to table center (mm)		110 ~ 920				
Surface configuration		24-M16@ pitch100 mm grid				
Feed drive						
Feed force	X / Y / Z (N)	6,283 / 11,519 / 6,283		8,639 / 8,639 / 8,639 (F) 10,603 / 10,603 / 10,603 (S)		
Rapid movement	X / Y / Z (m/min)	32		48		
	B (sec. /90 degree)	2.5 / 1.5				
Acceleration	X / Y / Z (m/s ²)	3 / 4 / 4 (F)		4 / 5 / 5 (F) (S)		
Dia. & pitch of the ball screw (mm)		Ø45 / 12		Ø45 / 16		
Accuracy Positioning / Repeatability						
ISO 230-2		0.008 / 0.004				
JIS 6338 (300 mm)		± 0.003 / ± 0.002				
VDI3441		0.008 / 0.004				
Main spindle						
Spindle taper		40 Taper				
Max. spindle speed		9,000	12,000	9,000	12,000	15,000 20,000 ⁽²⁾
Tool changer						
Tool selection		Random pocket, bidirectional selection (60ATC) Address fixed, random method (120ATC)				
Magazine positions		60 (std.) / 120 (opt.)				
Max. tool diameter w/o adjacent tool (mm)		Ø76.2 / Ø150 (60ATC) Ø95 / Ø190 (120ATC)				
Max. tool length (mm)		450				
Max. tool weight (kg)		10 (60ATC) 8 (120ATC)				
Max. tool weight moment <from spindle gauge line> (Nm)		10 (60 & 120ATC)				
Tool to tool time (sec.) ⁽¹⁾		2.3±0.2				
Chip to chip time (sec.) ⁽¹⁾		7±0.2				
Pallet changer						
Number of pallet		2				
Method of pallet changer		ARM type				
Pallet change time (sec.)		10.5±0.2				
Pallet changing repeatability (mm)		0.01				
Coolant system						
Coolant tank capacity (Liter)		450 L				
- Nozzle coolant pump capacity		75 L / min, 3 bar				
- Coolant through spindle pump capacity		25 L / min, 20 bar				
- Ceiling & wash down pump capacity		75 L / min, 3 bar				
Machine size						
Height (mm)		3,030				
Floor space W x D (mm)		3,450 x 4,280 (60ATC) 3,620 x 4,800 (120ATC)				
Weight (kg)		13,000 (60ATC) 16,000 (120ATC)				
Connections						
Main power		220~230V / 50-60Hz, 380~415V / 50-60Hz				
Power consumption (KVA)		37 (F)	45 (F) 44 (S)			49 (F) 53 (S) 39 (F)

Note: ⁽¹⁾At 60Hz. ⁽²⁾FANUC Control only.

Technical Data		HX505			
		A / B			
Specification code		E		P	
Work range					
Pallet size (mm)					
Max. work swing diameter (mm)					
Max. work piece height (mm)					
Table load capacity (kg)					
Travel X / Y / Z (mm)					
B minimum indexing (degree)					
Table surface to spindle center (mm)					
Spindle nose to table center (mm)					
Surface configuration					
Feed drive					
Feed force	X / Y / Z (N)	11,519 / 11,519 / 11,519		11,519 / 11,519 / 11,519 (F) 14,137 / 14,137 / 14,137 (S)	
Rapid movement	X / Y / Z (m/min)	32			
	B (sec. /90 degree)	2.5			
Acceleration	X / Y / Z (m/s ²)	3 / 4 / 4 (F)		3 / 4 / 4 (F) (S)	
Dia. & pitch of the ball screw (mm)		Ø45 / 12			
Accuracy Positioning / Repeatability					
ISO 230-2		0.008 / 0.004			
JIS 6338 (300 mm)		± 0.003 / ± 0.002			
VDI3441		0.008 / 0.004			
Main spindle					
Spindle taper		50 Taper			
Max. spindle speed		6,000	10,000	6,000	10,000
Tool changer					
Tool selection		Random pocket, bidirectional selection (40ATC) Address fixed, random method (60 & 120ATC)			
Magazine positions		40 (std.) / 60 & 120 (opt.)			
Max. tool diameter w/o adjacent tool (mm)		Ø110 / Ø220 (40 & 60ATC) Ø125 / Ø400 ⁽³⁾ (120ATC)			
Max. tool length (mm)		400			
Max. tool weight (kg)		15 (40ATC) 20 (60ATC) 30 (120ATC)			
Max. tool weight moment <from spindle gauge line> (Nm)		30 (40 & 60ATC) 50 (120ATC)			
Tool to tool time (sec.) ⁽¹⁾		3.4±0.2			
Chip to chip time (sec.) ⁽¹⁾		8±0.2			
Pallet changer					
Number of pallet		2			
Method of pallet changer		ARM type			
Pallet change time (sec.)		10.5±0.2			
Pallet changing repeatability (mm)		0.01			
Coolant system					
Coolant tank capacity (Liter)		450 L			
- Nozzle coolant pump capacity		75 L / min, 3 bar			
- Coolant through spindle pump capacity		25 L / min, 20 bar			
- Ceiling & wash down pump capacity		75 L / min, 3 bar			
Machine size					
Height (mm)		3,030			
Floor space W x D (mm)		3,450 x 4,280 (40ATC) 3,620 x 4,800 (60ATC) 3,620 x 6,750 (120ATC)			
Weight (kg)		13,500 (40ATC) 15,500 (60ATC) 17,000 (120ATC)			
Connections					
Main power		220~230V / 50-60Hz, 380~415V / 50-60Hz			
Power consumption (KVA)		44 (F)	48 (F)	44 (F) 44 (S)	48 (F) 53 (S)

Note: ⁽³⁾ Ø250 is standard, Ø400 only apply to special tools. (please refer to page 15)

Technical Data		HX635			
		A		B	
Specification code		HT	HS	HT	HS
Work range					
Pallet size (mm)		□630			
Max. work swing diameter (mm)		Ø950			
Max. work piece height (mm)		950			
Table load capacity (kg)		900			
Travel X / Y / Z (mm)		1,000 / 800 / 900			
B minimum indexing (degree)		1		0.001	
Table surface to spindle center (mm)		50 ~ 850			
Spindle nose to table center (mm)		150 ~ 1,050			
Surface configuration		24-M16 Tapped holes; pitch: 125			
Feed drive					
Feed force X / Y / Z (N)		11,780 / 14,920 / 11,780 (F) 14,137 / 14,137 / 14,137 (S)			
Rapid movement X / Y / Z (m/min)		40			
B (sec. /90 degree)		2.5		2	
Acceleration X / Y / Z (m/s²)		4 / 5 / 5 (F) (S)			
Dia. & pitch of the ball screw (mm)		Ø50 x 16			
Accuracy Positioning / Repeatability					
ISO 230-2		0.008 / 0.004			
JIS 6338 (300 mm)		±0.003 / ±0.002			
VDI3441		0.008 / 0.004			
Main spindle					
Spindle taper		50 Taper			
Max. spindle speed		6,000	10,000	6,000	10,000
Tool changer					
Tool selection		Random pocket, bidirectional selection (40ATC) Address fixed, random method (60 & 120ATC)			
Magazine positions		40 (std.) / 60 & 120 (opt.)			
Max. tool diameter w/o adjacent tool (mm)		Ø110 / Ø220 (40ATC) Ø125 / Ø230 (60ATC) Ø125 / Ø400 ⁽²⁾ (120ATC)			
Max. tool length (mm)		500			
Max. tool weight (kg)		15 (40ATC) 20 (60ATC) 30 (120ATC)			
Max. tool weight moment <from spindle gauge line> (Nm)		30 (40 & 60ATC) 50 (120ATC)			
Tool to tool time (sec.) ⁽¹⁾		3.9±0.2			
Chip to chip time (sec.) ⁽¹⁾		8.5±0.2			
Pallet changer					
Number of pallet		2			
Method of pallet changer		ARM type			
Pallet change time (sec.)		14±0.2			
Pallet changing repeatability (mm)		0.01			
Coolant system					
Coolant tank capacity (Liter)		900 L			
- Nozzle coolant pump capacity		60 L / min, 4 bar			
- Coolant through spindle pump capacity		25 L / min, 20 bar			
- Ceiling & wash down pump capacity		100 L / min, 2.6 bar			
Machine size					
Height (mm)		3,006			
Floor space W x D (mm)		4,225 x 6,730 (40ATC) 4,280 x 5,660 (60ATC) 4,280 x 7,550 (120ATC)			
Weight (kg)		19,600 (40ATC) 20,500 (60ATC) 22,500 (120ATC)			
Connections					
Main power		220~230V / 50-60Hz, 380~415V / 50-60Hz			
Power consumption (KVA)		48 (F) 47 (S)	51 (F) 47 (S)	48 (F) 47 (S)	52 (F) 47 (S)

Technical Data		HX805							
		A			B				
Specification code		HT		HS		HT		HS	
Work range									
Pallet size (mm)		□800							
Max. work swing diameter (mm)		Ø1,200							
Max. work piece height (mm)		1,100							
Table load capacity (kg)		1,500							
Travel X / Y / Z (mm)		1,200 / 1,000 / 1,000							
B minimum indexing (degree)		1			0.001				
Table surface to spindle center (mm)		30 ~ 1,030							
Spindle nose to table center (mm)		100 ~ 1,100							
Surface configuration		24-M16 Tapped holes; pitch: 160							
Feed drive									
Feed force	X / Y / Z (N)	11,780 / 14,920 / 11,780 (F)			14,137 / 18,850 / 14,137 (S)				
Rapid movement	X / Y / Z (m/min)	40							
	B (sec. /90 degree)	3			2.1				
Acceleration	X / Y / Z (m/s ²)	4 / 5 / 5 (F) (S)							
Dia. & pitch of the ball screw (mm)		Ø50 x 16							
Accuracy Positioning / Repeatability									
ISO 230-2		0.008 / 0.004							
JIS 6338 (300 mm)		±0.003 / ±0.002							
VDI3441		0.008 / 0.004							
Main spindle									
Spindle taper		50 Taper							
Max. spindle speed		6,000	7,500 (opt.)	15,000	6,000	7,500 (opt.)	15,000		
Tool changer									
Tool selection		Address fixed, random method							
Magazine positions		60 (std.) 120 (opt.)							
Max. tool diameter w/o adjacent tool (mm)		Ø125 / Ø230 (60ATC) Ø125 / Ø400 ⁽²⁾ (120ATC)							
Max. tool length (mm)		600							
Max. tool weight (kg)		20 (60ATC) 30 (120ATC)							
Max. tool weight moment <from spindle gauge line> (Nm)		30 (60ATC) 50 (120ATC)							
Tool to tool time (sec.) ⁽¹⁾		3.9±0.2							
Chip to chip time (sec.) ⁽¹⁾		8.5±0.2							
Pallet changer									
Number of pallet		2							
Method of pallet changer		ARM type							
Pallet change time (sec.)		19±0.2							
Pallet changing repeatability (mm)		0.01							
Coolant system									
Coolant tank capacity (Liter)		1,200 L							
- Nozzle coolant pump capacity		60 L / min, 4 bar							
- Coolant through spindle pump capacity		25 L / min, 20 bar							
- Ceiling & wash down pump capacity		100 L / min, 2.6 bar							
Machine size									
Height (mm)		3,658							
Floor space W x D (mm)		4,800 x 7,220 (60ATC) 4,860 x 7,850 (120ATC)							
Weight (kg)		25,000 (60ATC) 27,000 (120ATC)							
Connections									
Main power		220~230V / 50-60Hz, 380~415V / 50-60Hz							
Power consumption (KVA)		53 (F) 59 (S)		57 (F)		54 (F) 59 (S)		58 (F)	

Note: ⁽¹⁾ At 60Hz ⁽²⁾ Ø250 is standard, Ø400 only apply to special tools. (please refer to page 15)

●=Standard ○=Option ✕=N/A

Standard / Option accessories	HX504			
Specification code	AE	BE	AP	BP
■ FANUC 0i	●	●	✕	✕
FANUC - data server	○	○	✕	✕
■ FANUC 31i	✕	✕	●	●
AICC II (Lock-ahead 200 blocks)	✕	✕	○	○
FANUC - data server	✕	✕	○	○
FANUC - high speed processing (Lock-ahead 600 blocks)	✕	✕	○	○
■ SIEMENS 840D	✕	✕	○	○
■ Oil chiller	●	●	●	●
■ Coolant through ball screw	●	●	●	●
■ Balance tooling for spindle warm up	●	●	●	●
■ Pull stud for BT tooling	●	●	●	●
■ Air pressure detector for pallet clamping	●	●	●	●
■ Hydraulic through pallet (5 ports) ⁽⁵⁾	○	○	○	○
■ 2 pallet station	●	●	●	●
■ NC rotary table (0.001°) with rotary encoder	✕	○	✕	○
■ Linear encoder	○	○	○	○
■ Remote MPG	●	●	●	●
■ Transformer ⁽⁴⁾	○	○	○	○
■ Work probe	○	○	○	○
■ Thermal compensation	○	○	○	○
■ Tool length / breakage measurement (Laser) ⁽³⁾	○	○	○	○
■ 20 bar coolant through spindle	●	●	●	●
■ 50 bar coolant through spindle	○	○	○	○
■ 70 bar coolant through spindle	○	○	○	○
■ Ceiling wash down coolant	●	●	●	●
■ Base, wash down coolant	✕	✕	✕	✕
■ Coolant wash gun	●	●	●	●
■ Internal Chip augers	●	●	●	●
■ Internal Chip conveyor	✕	✕	✕	✕
■ External chip conveyor	●	●	●	●
■ Drum type conveyor	○	○	○	○
■ Bag filter	○	○	○	○
■ Oil-mist collector	○	○	○	○
■ Documentation (USB) ⁽²⁾	●	●	●	●
■ Work light	●	●	●	●
■ Machine status light	●	●	●	●
■ CE & EMC ⁽¹⁾ / GB	○	○	○	○

Note: ⁽¹⁾Standard for EU area. ⁽²⁾Paper documentation is option. ⁽³⁾HX504 / 505 / 635 / 805 only available for NC4S Renishaw.

⁽⁴⁾Transformer as standard or option item will be varied according to control system and power supply condition.

⁽⁵⁾Factory mounted only.


HX505		HX635		HX805	
AE	AP	A	B	A	B
●	×	×	×	×	×
○	×	×	×	×	×
×	●	●	●	●	●
×	○	○	○	○	○
×	○	○	○	○	○
×	○	○	○	○	○
●	●	●	●	●	●
●	●	×	×	×	×
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
○	○	○	○	○	○
●	●	●	●	●	●
×	×	×	○	×	●
○	○	○	○	●	●
●	●	●	●	●	●
○	○	○	○	○	○
○	○	○	○	○	○
○	○	○	○	○	○
○	○	○	○	○	○
●	●	●	●	●	●
○	○	○	○	○	○
○	○	○	○	○	○
●	●	●	●	●	●
×	×	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
×	×	×	×	●	●
●	●	●	●	●	●
○	○	○	○	○	○
○	○	○	○	○	○
○	○	○	○	○	○
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
○	○	○	○	○	○

Note: - Machine specification might be different from the catalog if there is any specification update.


Cutting area interference

Cutting area interference

HX404

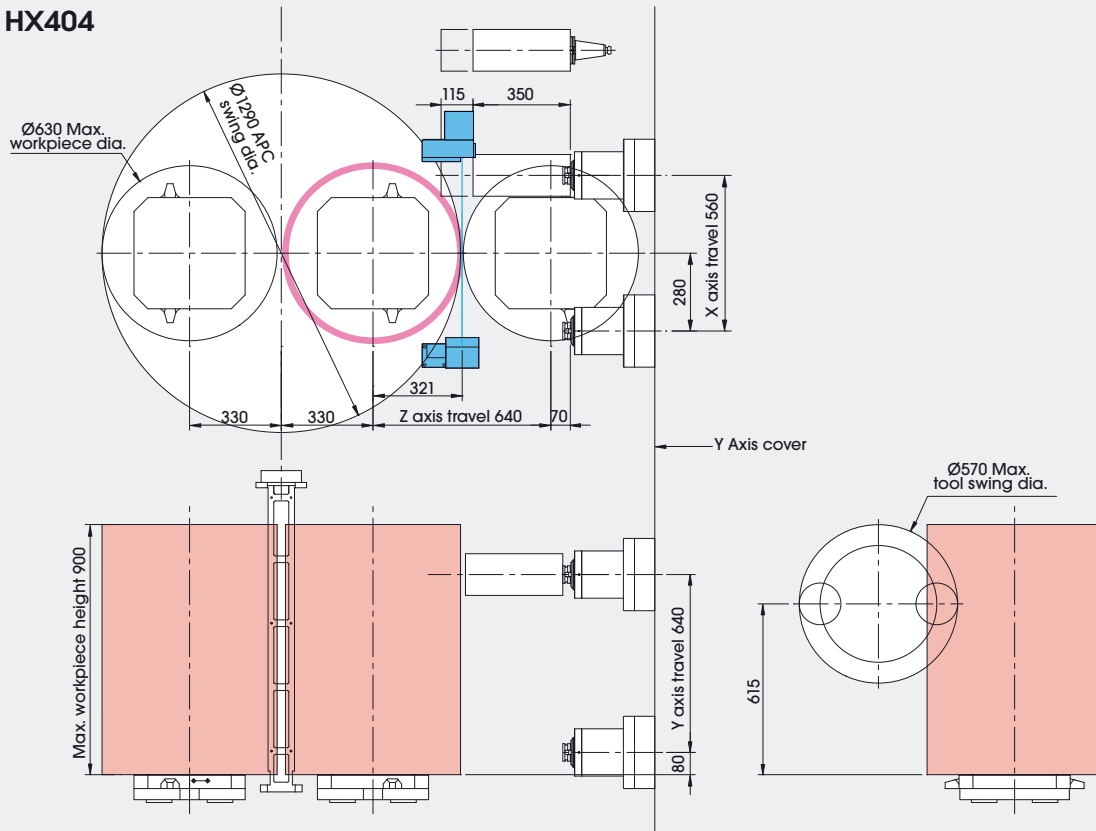


HX504 / HX505

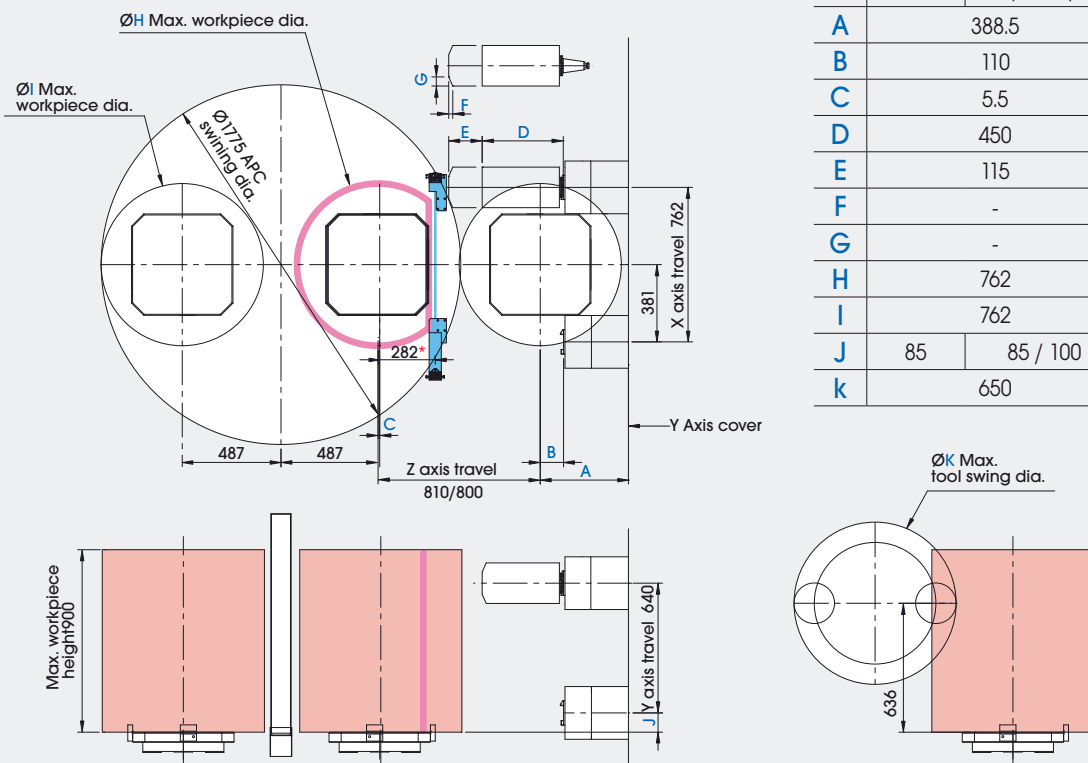

	HX504		HX505	
	E	P	E	P
	Belt	Belt / Coupling	Belt	Belt / Coupling
A		388.5		435
B		110		115
C		5.5		8
D		450		400
E		115		165
F		-		20
G		-		55
H		762		800
I		762		800
J	85	85 / 100	85	85 / 85
k		650		770

Note: *Maximum workpiece swing may impact "TOOL LENGTH MEASUREMENT" functionally.




HX635




Machine Dimensions

Pallet dimension



	HX404	HX504/HX505/8APC	HX635	HX805
A	$\varnothing 50^{+0.016}_0 \times 32\text{depth}$	$\varnothing 50^{+0.016}_0 \times 32\text{depth}$	$\varnothing 30^{+0.02}_0 \times 15\text{depth}$	
B	400	500	630	800
C	80	100	125	160
D	400	500	630	800
E	24-M16			
F	120	185	250	560
G	24	24	30	30
H	75	125	157.5	200
I	250	250	315	400
J	50	50	57.5	65
K	150	150	200	270
L	14.5	14.5	17	17
M	50	60	70	100
N	50	50	85	85

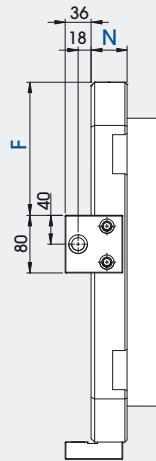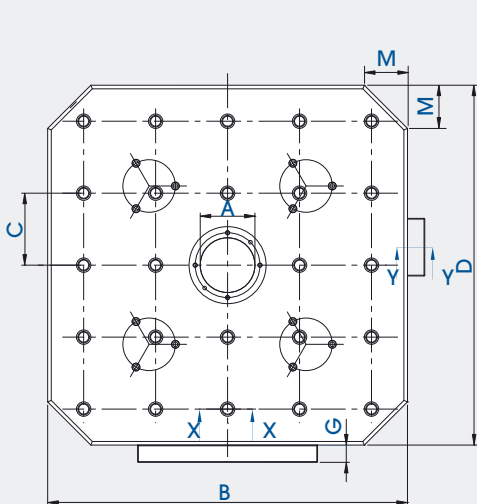


X-X SECTION




Y-Y SECTION

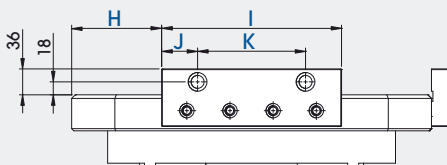

Z-Z SECTION



Fixture hydraulic
(HX404/HX504/HX505)




Fixture hydraulic
(HX635/HX805)

Installation dimension


HX404

- 1 Standard Machine
- 2 Magazine unit
- 3 Coolant supply unit
- 4 Chip conveyor
- 5 Spindle cooling unit & Hyd. tank unit
- 6 Transformer (Opt.)
- 7 Chip bucket (Opt.)
- 8 Oil-mist collector (Opt.)
- 9 Filtration unit (Opt.)

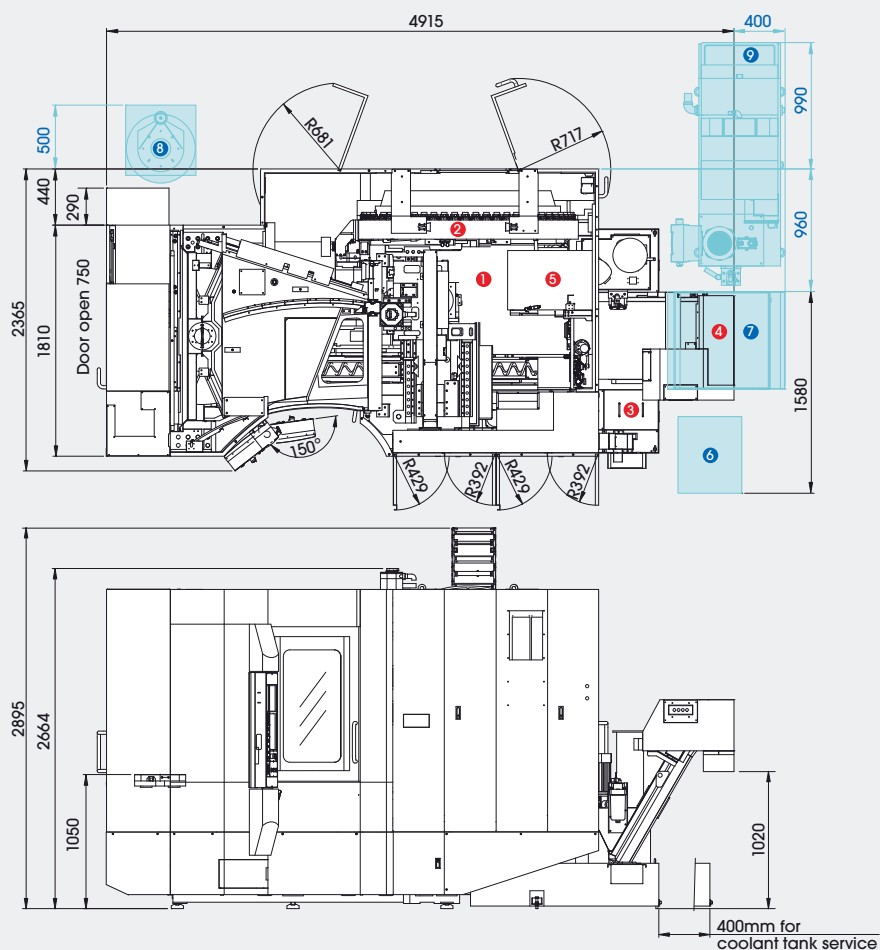

HX504/HX505

- 1 Standard Machine
- 2 Magazine unit
- 3 Coolant supply unit
- 4 Chip conveyor
- 5 Spindle cooling unit & Hyd. tank unit
- 6 Transformer (Opt.)
- 7 Chip bucket (Opt.)
- 8 Oil-mist collector (Opt.)
- 9 Filtration unit (Opt.)

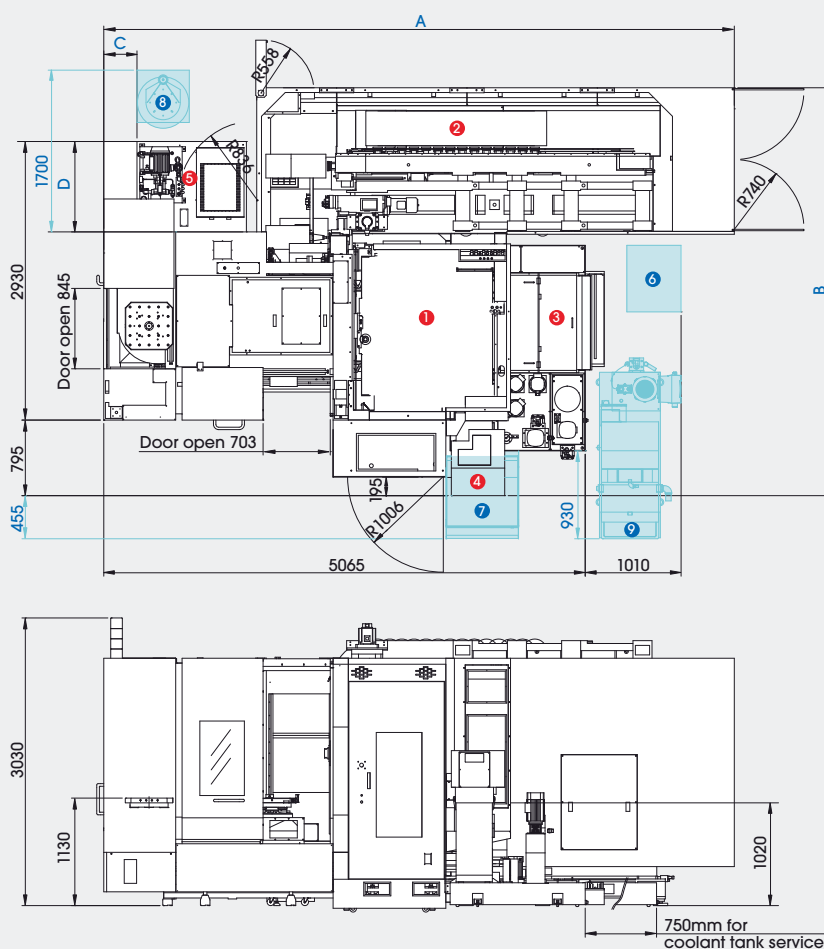

	HX504			
	A	B	C	D
60ATC	4,280	3,450	350	950
120ATC	4,800	3,620	350	950


	HX505			
	A	B	C	D
40ATC	4,280	3,450	350	950
60ATC	4,800	3,620	350	950
120ATC	6,750	3,620	350	950

Machine Dimensions

Installation dimension


HX635

- 1 Standard Machine
- 2 Magazine unit
- 3 Coolant supply unit
- 4 Chip conveyor
- 5 Spindle cooling unit & Hyd. tank unit
- 6 Transformer (Opt.)
- 7 Chip bucket (Opt.)
- 8 Oil-mist collector (Opt.)
- 9 Filtration unit (Opt.)

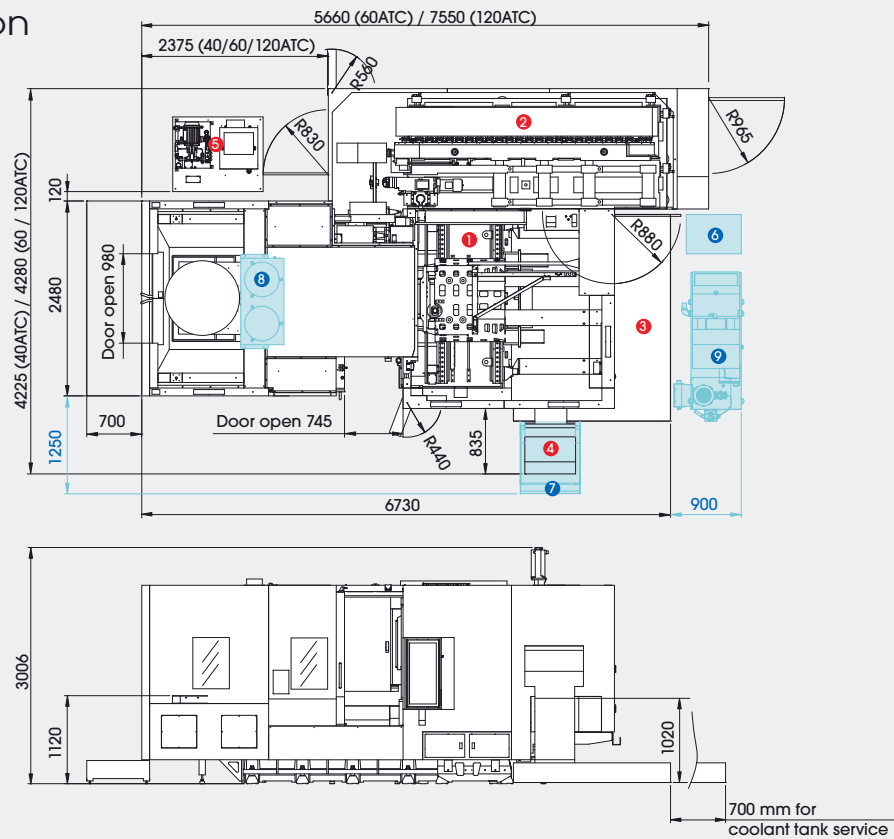

HX805

- 1 Standard Machine
- 2 Magazine unit
- 3 Coolant supply unit
- 4 Chip conveyor
- 5 Spindle cooling unit & Hyd. tank unit
- 6 Transformer (Opt.)
- 7 Chip bucket (Opt.)
- 8 Oil-mist collector (Opt.)
- 9 Filtration unit (Opt.)

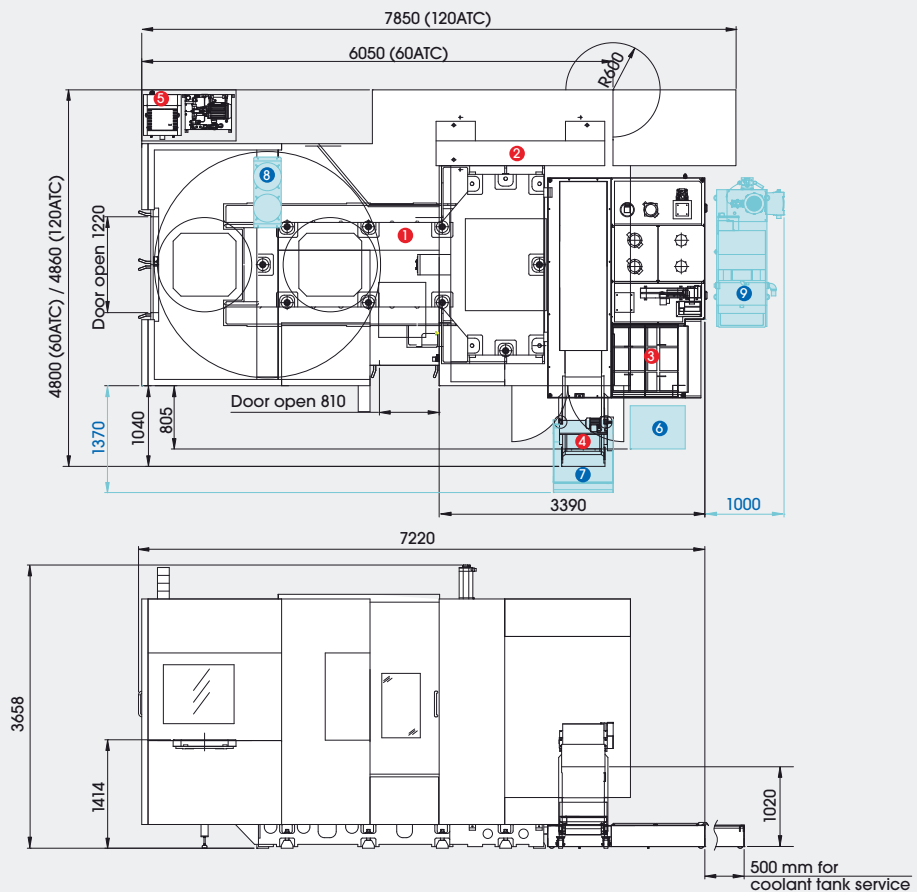

We build machines in a hybrid way

- Very classic craftsmanship combined with most advanced modern equipments in a clean environment...

QUASER MACHINE TOOLS, INC.

Address: No. 3, Gong 6th Rd., Youshih
Industrial Park, Dajia Dist,
Taichung City 43768, Taiwan

Tel: +886 4 26821277
Fax: +886 4 26822045
E-mail: sales@qmt.com.tw
Web: www.quaser.com



QUASER EUROPE TECHNICAL CENTER GmbH

Address: Carl-Zeiss-Strasse 22,
42579 Heiligenhaus,
Germany

Tel: +49 205 6259 6780
Mobile: +49 173 5488 713
E-mail: qe@qmt.com.tw



KUNSHAN QUASER MACHINE TOOLS, INC.

Address: (B) No. 287, Kangzhuang Road,
Zhoushi Town, Kunshan City,
Jiangsu, P.R. China

Tel: 0512-82627139
Fax: 0512-82627138
E-mail: qmtc@qmt.com.tw



QUASER AMERICA MACHINE TOOLS INC.

Address: 3049 Southcross Boulevard, Rock Hill,
SC, 29730, UNITED STATES

Tel: +1 803-324-7123
Fax: +1 888-459-8175
E-mail: qa@qmt.com.tw





**QUASER MACHINE TOOLS,
INC.**

Address: No. 3, Gong 6th Rd.,
Youshih Industrial
Park, Dajia Dist,
Taichung City 43768,
Taiwan
Tel: +886 4 26821277
Fax: +886 4 26822045
E-mail: sales@qmt.com.tw
Web: www.quaser.com

**QUASER EUROPE
TECHNICAL CENTER GmbH**

Address: Carl-Zeiss-Str. 22,
42579 Heiligenhaus,
Germany
Tel: +49 205 6259 6780
Mobile: +49 173 5488 713
E-mail: qe@qmt.com.tw

**KUNSHAN QUASER
MACHINE TOOLS, INC.**

Address: (B) No. 287,
Kangzhuang Road,
Zhoushi Town,
Kunshan City,
Jiangsu, P.R. China
Tel: 0512-82627139
Fax: 0512-82627138
E-mail: qmtc@qmt.com.tw

**QUASER AMERICA MACHINE
TOOLS INC.**

Address: 3049 Southcross
Boulevard, Rock Hill,
SC, 29730, UNITED STATES
Tel: +1 803-324-7123
Fax: +1 888-459-8175
E-mail: qa@qmt.com.tw

Fold here for filing!