




UX500


Multi Face ,5 Axes M/C

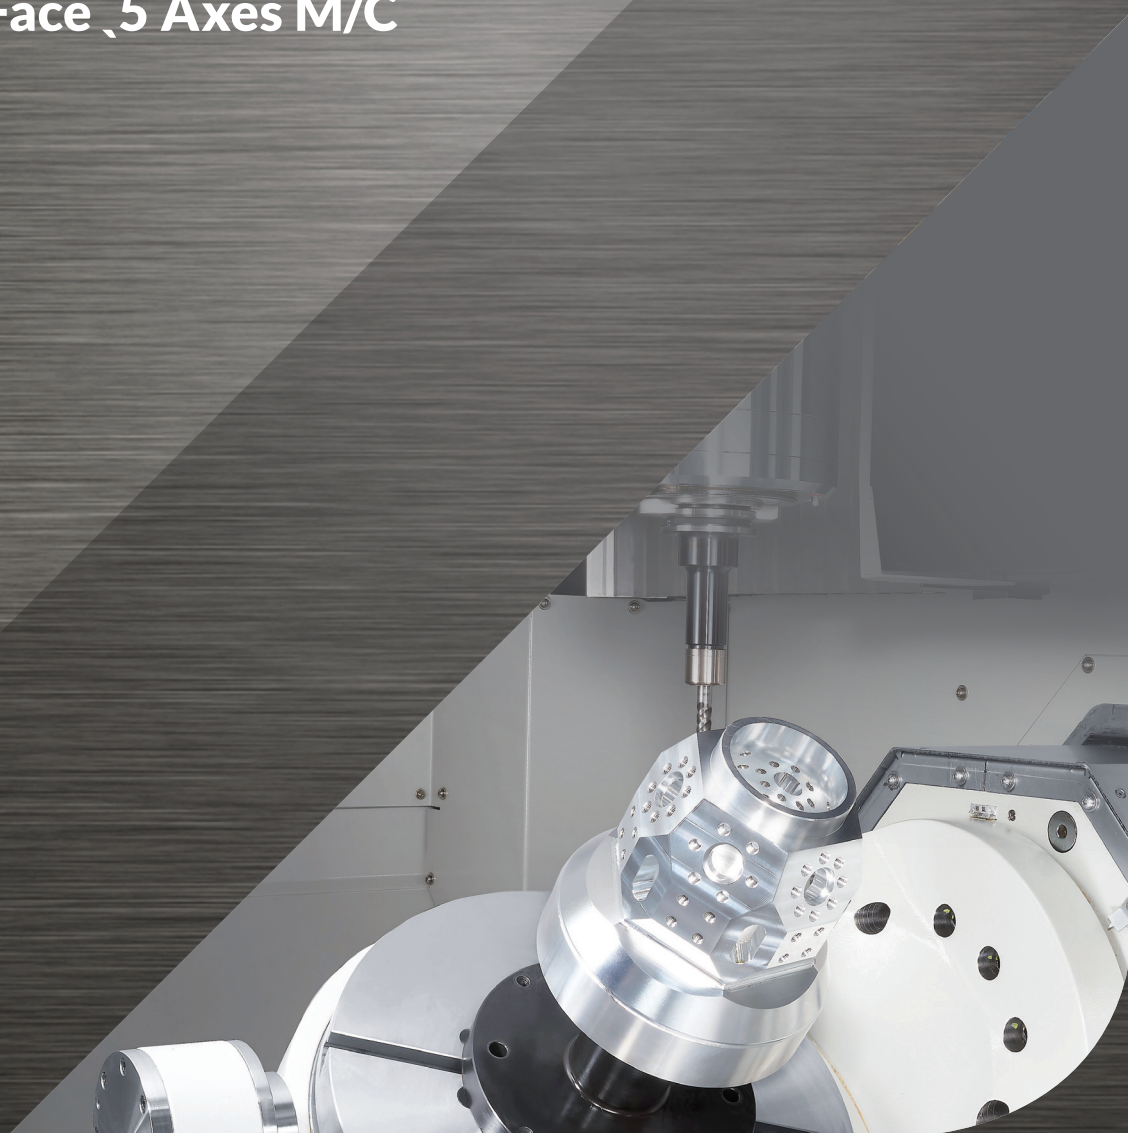


Cutting Area and Interference



	UX500C	
	Rotary Axis (C-axis)	Tilting Axis (B-axis)
Drive method	Worm	Worm
Max. work piece size (mm)	Ø 540 x 400	
Table load capacity (kg)	200	
Maximum R.P.M (min ⁻¹)	22.2	16.6(F/S); 22.2(T)
Indexing accuracy (sec)	8*	12*
Repeatability (sec)	4*	8*
Clamping torque (Nm)	1,600	2,500



Note: *With rotary encoder

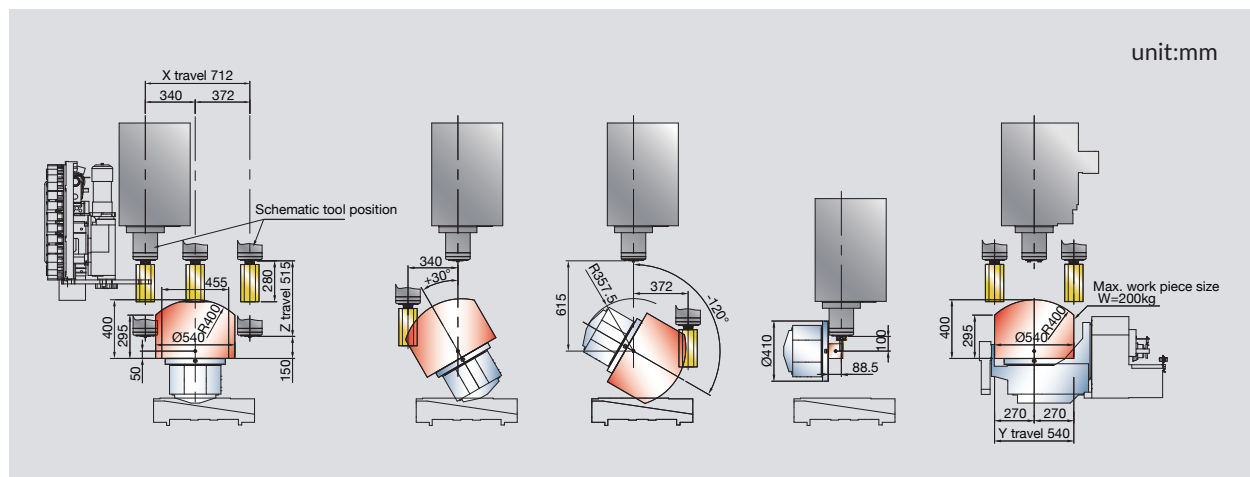


Ergonomic Operation



UX500		
A	Spindle to side door at a convenient	295mm
B	From center of table to front door	654mm
C	Max. size when front door open	820mm
D	Side door opening	545mm
E	Swivel type operation panel	
F	Documentation & hand tool shelf	
G	Tool loading/ unloading on magazine side	
H	Centralized configuration of lubrication and pneumatic panel	

ATC System

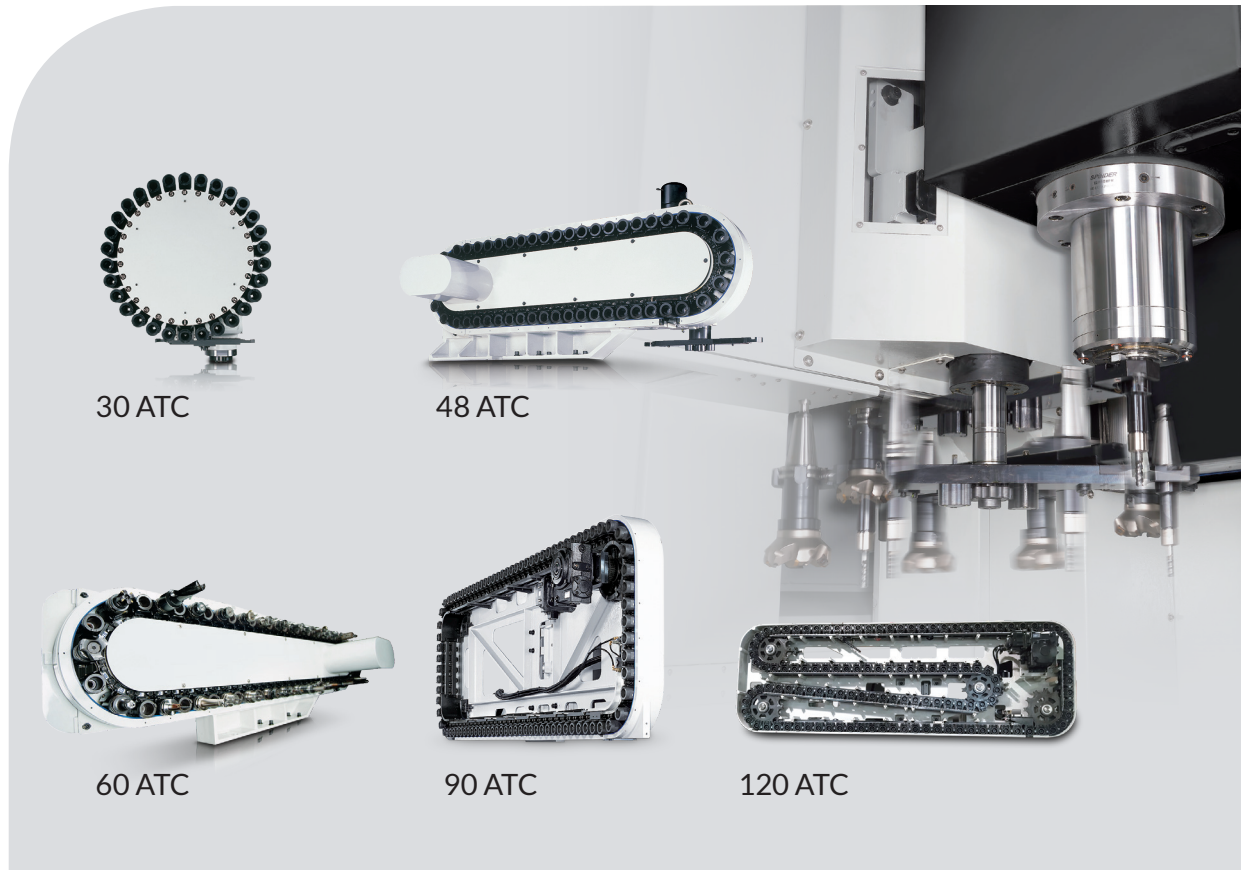

Coolant & Chip Management



	UX500C
Coolant tank	450L
Coolant through spindle	Opt.
Nozzle coolant	3 bar
Wash gun	Std.
Chip augers	Std.
Wash down	3 bar

Standard / Optional Accessories

Standard / Optional accessories	UX500	
	C	
	Multi face	5 axes
Spindle code	12C	
FANUC 0i-MF Plus (5 Face)	●	×
HEIDENHAIN TNC620 (5 Face)	○	×
HEIDENHAIN TNC640 (5 Axes)	×	○
HEIDENHAIN advanced function set2	×	○
SIEMENS 828D	○	×
Oil chiller	●	●
40 taper / 30 position tool magazine	●	●
40 taper / 48 / 60 / 90 / 120 position tool magazine	○	○
Pull stud for BT tooling	○	○
Balance tooling for spindle warm up	○	○
BBT spindle attachment (Double contact)	●	●
ATC auto door	●	●
X / Y / Z linear scale	○	○
Rotary encoder on B & C axes	●	●
Remote manual pulse generator	●	●
Transformer ⁽¹⁾	○	○
Work probe receive OMI-2T	●	●
Work probe OMP-40	○	○
Tool length / breakage measurement	○	○
6 Port through table	○	○
Reference rod (for thermal comp with probe)	●	●
Coolant system	●	●
Coolant through ball screw	○	○
Coolant through spindle 20 bar	○	○
Coolant wash gun	●	●
Coolant wash down	●	●
Air gun	○	○
Chip conveyor	●	●
Chip augers	●	●
Cutter air blast	●	●
Oil-mist collector	○	○
Bag filtration	○	○
Filtration unit	○	○
Documentation (USB) ⁽²⁾	●	●
Total Enclosure Guard (with Top side cover)	●	●
Work light	●	●
Machine status light	●	●
CE & EMC ⁽³⁾ / GB	○	○

Note: ⁽¹⁾ Transformer as standard or optional item will be varied according to control system and power supply condition.

⁽²⁾ Paper documentation is optional. ⁽³⁾ As standard for EU area.

● Standard ○ Option × N/A

Technical Data

Technical Data		UX500	
		C	
		Multi face	5 axes
Spindle code		12C	
Work range			
Table size (mm)		Ø410	
Travel	X / Y / Z (mm)	712 / 540 / 515	
	B / C (degree)	+30° ~ -120° / 360° (Continuous)	
Max. swing (mm)		Ø540	
Table surface to spindle nose (mm)		150 ~ 665	
Spindle nose to tilting center at 90° (mm)		150 ~ 665	
Max. work piece size (mm)		Ø540 x 400 ⁽¹⁾	
Table load capacity (kg)		200 kg	
Feed drive			
Feed force	X / Y / Z (N)	6,283 / 6,283 / 11,519 (F)	
		6,283 / 6,283 / 14,137 (S)	
		9,268 / 9,268 / 11,310 (T)	
Rapid movement	X / Y / Z (m/min)	36 / 36 / 36	
	B / C (min ⁻¹)	B=22.2(T) 16.6(F ; S) / C=22.2	
Acceleration	X / Y / Z (m/s ²)	3 / 3 / 2.5	
Dia. & pitch of the ball screw (mm)		Ø40 / P= 12/ 12/ 12	
Main spindle			
Spindle taper		BBT40	
Max. spindle speed		12,000	
Spindle base speed		1,500	1,500
Spindle output power (kW)	F*	18.5	15
	T / S**	17 / 13.3	
Spindle output torque (Nm)	F*	118	95.5
	T / S**	108 / 85	
Spindle transmission		Coupling	

Technical Data	UX500	
	C	
	Multi face	5 axes
Spindle code	12C	
Tool changer		
Tool selection	Random	
Magazine positions	30 (std.) 48 / 60 / 90 / 120 (opt.)	
Max. tool diameter w/o adjacent tool	Ø76.2 / Ø125	
Max. tool length	280	
Max. tool weight	7 kg	
Tool to tool time (sec.)	1.7±0.2	
Chip to chip time (sec.)	9.0±0.2	
Coolant system		
Coolant tank capacity (Liter)	450L	
Pump capacity	75 / min., 3 bar	
- Nozzle coolant	Opt. (25L/min.,20bar)	
- Coolant through spindle		
- Wash down	75 L/min., 3 bar	
Machine size		
Height (mm)	3,360	
Floor space W x D (mm)	2,770 x 4,040	
Weight (kg)	8,430 (30ATC) 8,730 (48ATC) 8,930 (60ATC) 9,690 (90ATC) 9,750 (120ATC)	
Connections		
Main power	220V or 380V or 400V or 415V / 50Hz or 60Hz	
Power consumption (KVA)	30(F)(T) 25(S)	

Control: (F) FANUC (S) SIEMENS (T) HEIDENHAIN

Note: ⁽¹⁾ Please refer to actual max. workpiece interference diagram.

* (S3-25%) ** (S6-25%)

- Machine specification might be different from the catalog if any specification is updated.

Machine Dimensions

Installation dimension




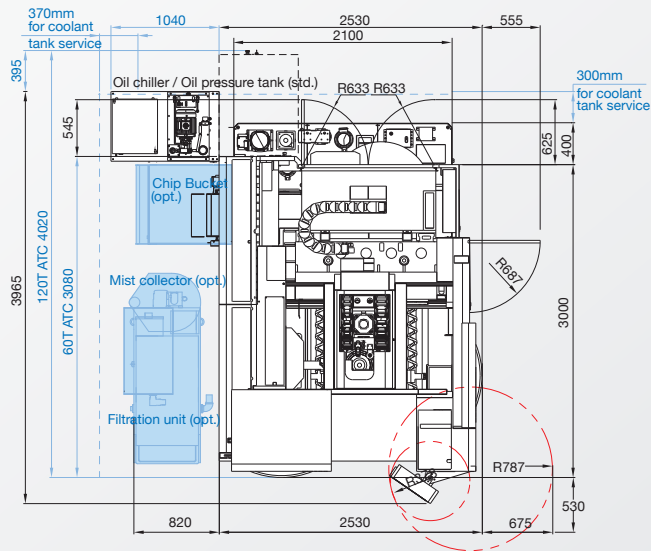


Table dimension

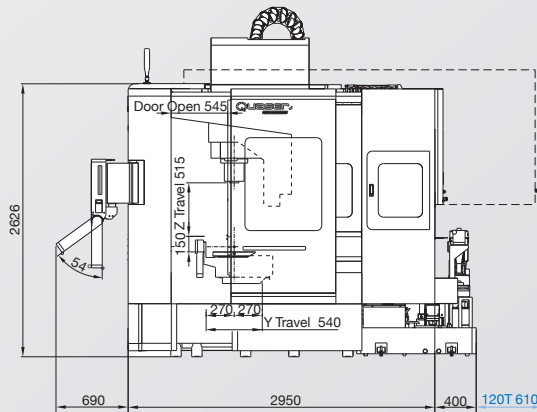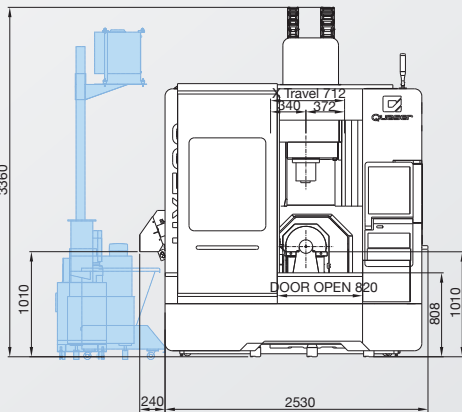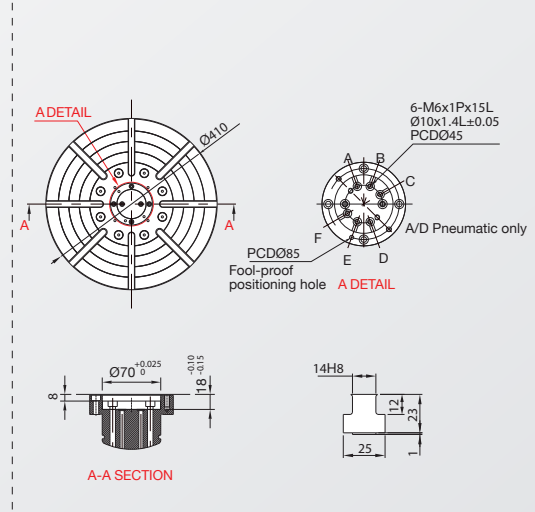

Taichung Taiwan

No.3, Gong 6th Rd., Youshih Industrial Park,
Dajia Dist, Taichung City 43768, Taiwan

www.quaser.com
sales@qmt.com.tw
T +886 426821277
F +886 426821266

Jiangsu China

(B)No.287, Kangzhuang Rd., Zhoushi
Town, Kunshan City, Jiangsu, P.R. China

qmtc@qmt.com.tw
T 051282627139
F 051282627138

Heiligenhaus Germany

Carl-Zeiss-Straße 22, 42579
Heiligenhaus, Germany

qe@qmt.com.tw
T +49 205 6259 6780
F +49 173 5488 713

South Carolina USA

3049 Southcross Boulevard, Suite 105
Rock Hill, South Carolina 29730 USA

sales@winbrogroup.com
T +1 803 985 9481 (Sales)
F +1 888 948 6400 (Service)

Leicestershire UK

Unit 1, Gelders Hall Road, Shepshed
Leicestershire LE12 9NH, UK

sales@winbrogroup.com
T +44 (0)1530 516 000